

CLEAN HYDROGEN JOINT UNDERTAKING (CLEAN HYDROGEN JU)

Safety Planning and Management in Hydrogen and Fuel Cells Projects – Guidance Document

01 May 2023

NOTICE

This document is prepared by the European Hydrogen Safety Panel (EHSP) with the mandate and support of the Clean Hydrogen Joint Undertaking (Clean Hydrogen JU). Neither the Clean Hydrogen JU nor the EHSP makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favouring by the Clean Hydrogen JU or the EHSP.

The views and opinions of authors expressed herein do not necessarily state or reflect those of the Clean Hydrogen JU or the EHSP. Additionally, the document does not provide any approval or endorsement by the Clean Hydrogen JU or the EHSP of any system(s), material(s), equipment or infrastructure discussed in the document

Document history

Version	Release date	Description
1 (181210)*	10 Dec 2018	First unpublished release version.
1.1	20 Dec 2018	Figures for fire triangle and explosion pentagon added.
1.2	21 May 2019	Second release after reformatting, minor editorial changes. The first version to be published in the public domain.
1.3	21 Jun 2019	Addition of a failure tree description and reformatting/updating of other figures. EIGA document on safety distances added as a reference for checklist methods.
1.31	5 Jul 2019	ATEX and one reference added in the risk assessment (Appendix 4).
1.32	15 Nov 2019	Update of the references to European directives in Annex 2.
210426	26 Apr 2021	The title and structure of the document are changed, text amended to include elements of safety plan implementation and safety management.
210628	28 Jun 2021	Comments of reviewers are accepted.
210711	11 Jul 2021	Comments of TF1 Chair are accepted, Appendix 2 is amended.
210909		Comments of FCHJU processed and further editorial changes by TJ
210910		Added modification on Transport of dangerous goods; comment by GM
2.0	21 Sept 2021	New major release version
2.1	01 May 2023	Update

Note: * - version number style is changed to “YYMMDD” starting from version “210426” for non-released versions only.

Table of Contents

1	INTRODUCTION	1
2	CONTENT OF SAFETY PLAN	3
2.1	Objectives	3
2.2	An exemplary table of content of a safety plan	5
3	PREPARATION OF SAFETY PLAN	7
3.1	Project brief	7
3.1.1	Description of a system, process or infrastructure to be developed by the project	7
3.1.2	Description of safety systems and their functions	8
3.1.3	Safety expertise and responsibilities in the project	8
3.1.4	Relevant RCS	8
3.1.5	Best safety practices	9
3.1.6	Schedule of the safety plan update and reporting	10
3.1.7	Composition, responsibilities and reporting schedule of a safety team.....	10
3.2	Description of technical hydrogen safety activities.....	10
3.2.1	Identification of safety vulnerabilities, hazards and associated risks.....	10
3.2.2	Selection of incident scenarios	11
3.2.3	Content and methods of hydrogen safety engineering to be applied	11
3.2.4	Prevention and mitigation strategies and innovative engineering solutions	11
3.2.5	Reporting results on hydrogen safety engineering progress and risk assessment as applicable	11
3.3	Description of organisational safety activities	11
3.3.1	Description of work to be performed by staff that needs formal safety procedures	11
3.3.2	General safety considerations to prevent harm to people in a workplace	13
3.3.3	Personnel training and education plan	13
3.3.4	Safety review procedures and/or self-audits	14
3.3.5	Emergency response arrangements	14
3.3.6	Management of Change (MOC) procedures	15
3.3.7	Reporting on safety management and lessons learnt.....	16
3.3.8	Project safety documentation	17
3.4	Other relevant documentation, safety procedures and outreach activities	18
3.4.1	Positive data reporting	18
3.4.2	Crisis management procedures	18
3.4.3	Dissemination plan of project findings in hydrogen safety, including closed knowledge gaps and addressed technological bottlenecks.....	18
4	SAFETY PLAN IMPLEMENTATION, MONITORING AND REPORTING.....	19
4.1	Performing safety reviews	19

4.2	Implementation of hydrogen safety engineering process	20
4.3	Examples of best practices in hydrogen safety engineering	23
4.4	Project safety documentation	27
5	EUROPEAN HYDROGEN SAFETY PANEL	28
	Appendix 1. Hydrogen safety terminology and abbreviations	30
	Appendix 2. Applicable Regulations, Codes and Standards	37
	Legal framework.....	37
	Regulations and standards.....	37
	Role and distinction	37
	EU legislation.....	38
	Hydrogen gas regulations.....	39
	EU directives relevant for hydrogen	39
	Hydrogen standards related to hydrogen	44
	Appendix 3. Known best practices to implement safety strategies	47
	Appendix 4. Methods for identification of safety vulnerabilities, hazards and risk assessment	51
	Hazard and Operability Analysis (HAZOP)	54
	Risk Binning Matrix	56
	Failure Mode and Effect Analysis (FMEA)	58
	Appendix 5. Safety plan checklist.....	60
	Appendix 6. Additional notes on a safety plan	63

1 INTRODUCTION

This document is prepared by the European Hydrogen Safety Panel (EHSP)¹, which was formed in 2017 by the Fuel Cell and Hydrogen Joint Undertaking, since 2021 Clean Hydrogen Joint Undertaking (Clean Hydrogen JU). The mission of the EHSP is to assist the Clean Hydrogen JU in assuring that hydrogen safety is adequately managed both at the programme and at project levels, and in the dissemination of an excellent hydrogen safety culture.

The document provides information on safety planning, implementation, and reporting for projects involving hydrogen and/or fuel cell technologies. It does not intend to replace or contradict existing regulations which prevail under all circumstances until amended. Neither is it meant to conflict with relevant international or national standards or to replace existing company safety policies, codes and procedures. Instead, this guidance document aims to assist projects and project partners in identifying hazards and associated risks, in prevention and/or mitigation of them through a proper preparation of the safety plan, monitoring and implementing the safety plan, and reporting the plan delivery and safety related events to inform the stakeholders. This shall help in safely delivering the project and ultimately producing inherently safer systems, processes and infrastructures.

Sharing best practices in the production, storage, distribution and use of hydrogen is essential for the provision of life safety, property and environmental protection. The long-term experience and accumulated knowledge in hydrogen safety research and engineering gained by EHSP experts, many of which are also members of the International Association for Hydrogen Safety (IA HySafe)², is the basis of this guidance document. The experience gained in communications with the US Hydrogen Safety Panel and other international expert groups provided additional valuable input.

As hydrogen and fuel cell technologies gain a greater commercial foothold, safe practices in the production, storage, distribution and use of hydrogen are essential for safe demonstrations, positive perception and widespread public acceptance and trust.

The project consortium is expected to be able to identify, study, analyse and report on hazards and associated risks, development and application of prevention/mitigation strategies, innovative engineering solutions of safety related issues and formulate safety guidelines as required. For emerging technologies like hydrogen technologies without broader experience and without a robust incidents statistical database this hydrogen safety engineering approach is best suited to protect life, property and environment from adverse effects of incidents involving hydrogen. Note: The use of the term incident is intended to include the term accident³ (see definition in Appendix 1).

¹ https://www.clean-hydrogen.europa.eu/get-involved/european-hydrogen-safety-panel-0_en

² <https://hysafe.info/>

³ ISO 19880-1:2020

A safety plan should address potential hazards and associated risks to people, property and the natural and built environment. It should include known/established and innovative measures to prevent and/or mitigate identified hazards and risks, e.g. by performing hydrogen safety engineering for selected scenarios. The comprehensive safety plan should address not only potential hazards coming from hydrogen, but also from other sources (for instance coming from oxygen, coolants such as ethylene glycol, etc.). However, this guidance document is focused mostly on hydrogen safety. As an integral part of any project, hydrogen installation, and fuel cell system, a safety plan should identify safety vulnerabilities, suggest elimination or control of hazards and introduce mitigation measures to keep the risk at an acceptable level. Appropriate communications on safety issues between the project consortium and external parties are equally important and should be described in the safety plan, including how the plan will be implemented, including its monitoring and reporting as required. The safety-related documents and processes should be revised periodically to reflect new knowledge and best practices.

Off-normal conditions, near-misses and incidents associated with the project, especially root courses, failure mechanisms and lessons learnt shall be reported and transferred to relevant databases. The high frequency low consequences events are important as they are typically precursors of more severe incidents. Technical details may be reported in the public database HIAD 2.0⁴. Even publication in handbooks, papers, and other publications is appropriate and helps improving the safety knowledge base.

⁴ HIAD 2.0 is temporarily not accessible online. You can as the most recent dataset at : JRC-PTT-H2SAFETY@ec.europa.eu

2 CONTENT OF SAFETY PLAN

2.1 Objectives

A thorough and integrated approach to project safety planning, implementation, including continuous plan delivery monitoring, and reporting need to address both **technical** and **organisational** tiers. Drafting of a safety plan may be a mandatory requirement in the preparation of some proposals where the need to address safety issues is apparent. EHSP suggests that all projects, where a consortium sees potential hydrogen safety concerns, consider addressing hydrogen safety in the form of preparation of a draft of the safety plan at the proposal stage.

The safety plan has to be drafted with a clear understanding that the plan would need to be further updated, implemented and results to be reported internally and/or externally along the project lifetime as new information and data become available. The preparation of the project safety plan must involve all partners to a different extent as needed. Besides, other stakeholders and/or third parties could be involved in the drafting of the safety plan, e.g. first and second responders, entities with a track record and internationally recognised standing in the field of hydrogen safety, etc.

The project safety plan **aim** is to develop **technical** and **organisational** activities to:

- Ensure that project outputs in a form of device, system, process and/or infrastructure provide an adequate level of safety and follow or even improve the state-of-the-art;
- Identify and address essential for the project success knowledge gaps and technological bottlenecks if relevant;
- Formulate activities providing a high level of technical and organisational safety activities in the project delivery.

This aim can be achieved through the delivery of the following key **objectives** that should be reported in relevant project deliverables:

- Review the state-of-the-art in safety provisions of systems and processes related to the project;
- Identify system or process vulnerabilities, select incident scenarios, including low-frequency high consequences scenarios;
- Apply available hydrogen safety engineering models and tools to assess hazards and associated risks for selected scenarios. In case of absence of models and tools, develop and validate new models to perform hydrogen safety engineering for a system, infrastructure or process under the project scope;
- Continuously update the initial safety plan during the project to include new knowledge and information, appoint safety professionals to thoroughly monitor the plan's implementation by all partners and the project as a whole, and report results on safety findings in the deliverables, reports, databases, through publications, etc.

A safety plan should be prepared based on the level of hazards, associated risks and system or process complexity. The plan should cover all work being conducted, including experimental/operational activities, with emphasis on the aspects

involving hydrogen safety knowledge, hazardous materials, pressure equipment, hydrogen safety system peculiarities, etc. There may be cases when an initial version of the safety plan is developed. In the initial safety plan, elements such as hazards and associated risk analysis, incident scenarios, prevention and mitigation techniques can be covered more generally without details, however a reference to the associated documents shall be given and these documents shall be available. It is recommended that a detailed description of the safety plan is prepared within the initial phase of the project which should be followed by regular updates, e.g. in the form of project deliverables/reports, to reflect new information, data and management of changes.

The threefold interconnected activities of the successful safety plan development and delivery are:

- (a) preparation of detailed safety plan by persons experienced in hydrogen safety,
- (b) monitoring (including self auditing) of its progress during the entire duration of the project,
- (c) reporting of results and observations as appropriate.

This is an established practice of proper planning to follow the so-called “WWW” principle that requires explicitly define for each item of the plan “What” (unambiguous title for a work to be done) should be done by “Whom” (names of responsible and contributing persons) and “When” (deadlines for milestones, if needed, and final report/deliverable).

The **ultimate goal** of the safety plan is to demonstrate that the consortium is able and willing to do everything possible to prevent or at least mitigate identified hazards and associated risks during the project delivery and that developed hydrogen system, process and/or infrastructure elements are providing the required level of safety or even improve the state-of-the-art with regard to hydrogen safety. The safety plan should demonstrate how the issue of life, safety, property and environmental protection will be addressed. The specific protection goals are:

- **People.** Hazards that pose a risk of injury or loss of life to people during the project delivery must be identified and eliminated or mitigated to the risk at the same or lower level compared to existing systems. A safety assessment should consider not only that personnel who are directly involved in the work but also others who could be at a risk due to these hazards. The same is applied to project outputs.
- **Property.** Damage to or loss of property, e.g. equipment or facilities, must be prevented or mitigated by proper engineering works and organisational safety measures. Damage to equipment can be both a cause of an incident and a result of an incident. An equipment failure can result in collateral damage to nearby equipment and property, which can then trigger additional equipment failures or even escalate with additional hazards and risks, e.g. through the domino effect. Effective planning and implementation of the safety plan should not only declare how safety will be provided but demonstrate how it will be achieved technically and organisationally.
- **Environment.** Hydrogen is a clean fuel. However, possible damage to the environment from hydrogen systems or infrastructure, e.g. due to thermal or pressure effects of an incident, must be prevented or mitigated. Any potential hazard to the natural or the built environment from a hydrogen system or infrastructure in case of failure should be identified and considered in the safety plan.

2.2 An exemplary table of content of a safety plan

This section gives, as guidance, prototypical elements and a reasonable structure of a project safety plan, contained in an example of a possible table of content (ToC). Depending on the project nature, items of ToC could be changed, added or removed. The safety plan should be a “living document” that recognises the type of work being conducted, the factors of human error, the nature of equipment design and operation, and considers the inevitable changes that occur in project development and execution.

So, the following example of a “good” ToC of a **safety plan** should not be considered as an exhaustive or mandatory list of safety considerations for all projects.

Exemplary table of content of a safety plan

1. Project brief

- Description of a system, inventory of hydrogen and other potential hazardous substances/ elements, process or infrastructure to be developed by the project
- Description of safety systems and their functions, implementing the state of the art
- Safety expertise and responsibilities available in the consortium
- Relevant RCS and safety policies
- Best safety practices
- Schedule of the safety plan updates and deliverable reporting
- Composition, responsibilities and reporting schedule of a safety team

2. Description of technical hydrogen safety activities

- Identification of safety vulnerabilities, hazards and associated risks
- Selection of incident scenarios
- Content and methods of hydrogen safety engineering to be applied
- Prevention and mitigation techniques and strategies and innovative engineering solutions applied
- Reporting results on hydrogen safety engineering progress and risk assessment as applicable

3. Description of organisational safety activities

- Description of work to be performed by staff that needs formal safety procedures
 - Operating steps
 - Sample handling and transport
 - Equipment and mechanical Integrity
 - Other relevant work components
- General safety considerations to prevent harm to people in a workplace
- Personnel training and education plan
- Safety review procedures and/or self-audits
- Emergency response arrangements and close exchange / collaboration with fire fighter and training
- Management of change procedures
- Reporting on safety management and lessons learnt (reports of near-misses and incidents, if any, and lessons learned for safety databases)

4. Documentation

- Project safety documentation

- Positive data reporting
- Crisis management
- Dissemination plan of project findings in hydrogen safety, including closed knowledge gaps and addressed technological bottlenecks

3 PREPARATION OF SAFETY PLAN

For the convenience of the project planning and implementation of the safety plan during the project delivery, the elements of the model safety plan content listed in the previous chapter are overviewed in this chapter, including the ways of their implementation. The text boxes provide useful background information on the best safety practices or present exemplary implementations for certain project types. This information is not exhaustive and should be thoughtfully considered during the updating of the safety plan (at least an annual update should be performed), and its implementation, including monitoring and reporting.

Appendix 5. Safety plan checklist” provides a guiding table for the assessment of a safety plan completeness with the understanding that all elements of the ToC presented for the exemplary safety plan above are neither exhaustive nor mandatory. This approach adds flexibility in shaping the safety plan depending on the project’s nature that could vary in a wide range of hydrogen technologies.

3.1 Project brief

This section should include a concise description of the project with a focus on safety aspects, both the safety of the system, process or infrastructure to be developed/demonstrated and operational safety management during the project delivery.

3.1.1 Description of a system, process or infrastructure to be developed by the project

The safety plan should describe the **nature of the work** to be performed in the project with an emphasis on safety elements. It should preferably distinguish between laboratory-scale research, bench-scale testing, engineering development (including safety engineering), prototype development, testing, operation, demonstration application, etc. All intended **project phases/relevant work packages** should be overviewed again with emphasis on safety issues and envisaged ways how they will be addressed.

It is important to assess the amount of hazardous materials generated, used, and stored. For example, the plan should include the **quantity of hydrogen and the form in which it will be handled and/or stored (compressed gaseous, cryo-compressed or liquid)**. Description of how often the hydrogen is replenished in storage and by what method (see

Appendix 6. Additional notes on a safety plan”) is important as well. Even laboratory-scale experiments may result in substantial hazards and associated risks when a quantity of hydrogen or other hazardous material is used or stored in or near the laboratory and safety measures are not properly planned and implemented. Hydrogen safety engineering shall be used for situations and scenarios that cannot be addressed by existing RCS for whatever reason. The inclusion of a preliminary layout, a flow diagram showing equipment such as PID, including a functional description of each component with geometrical and flow parameters are very useful.

The plan should discuss the **location of activities** (description of facilities, types of personnel, other operations/testing performed at the facility, adjacent facilities e.g., exposure to the public)

and describe how the activities will be coordinated. Any relevant permits that apply to current and planned operations should be listed.

For example, the description of work for a hydrogen fuelling station should include information such as the location of the station (at an existing gasoline station, close to a convenience store, etc.), the number of assumed fills per day, the source (gaseous, liquid, electrolyser, reformer, etc.) and the quantity of the hydrogen stored onsite, hydrogen mass flow rate required for system operation, pipeline maximum pressures and diameters, vent pipe design criteria, etc.

3.1.2 Description of safety systems and their functions

This section could be a stand-alone section or it can be embedded into the previous section with the project nature description. A brief description of planned safety systems and elements should be described. If existing knowledge does not address safety concerns of the system, process or infrastructure elements that are under development in the project then the safety plan should describe how it is planned to close identified knowledge gaps and technological bottlenecks. To this end, projects are recommended to have a safety-related work package (WP) addressing safety considerations. In this case, the brief on this WP content should be presented.

3.1.3 Safety expertise and responsibilities in the project

Early identification of professional safety expertise in the project is important. Persons skilful in hydrogen safety should be involved as early as possible, preferably at the initial stage, to ensure that relevant RCS, safety engineering knowledge, best practices and safety procedures are properly accounted for, described and consistently applied as part of the project implementation. The expertise should be sought in safety relevant activities that could include but not limited to:

- Safety analysis of a system, process or/and infrastructure documentation, ensuring that safety issues are properly addressed and budgeted to close the most important knowledge gaps and technological bottlenecks.
- Reviewing RCS and safety engineering solutions to assist with approval of project outcomes if needed.
- Inspecting and performing regular reviews of the installation to ensure the safe execution of the project.
- Reporting and investigating of near-misses and incidents, formulation of lessons learned and reporting to databases and publicly available sources like conference and journal papers.
- Understanding of knowledge gaps and technological bottlenecks in the area of the project.
- Track record in performing hydrogen safety research and/or engineering, etc.

3.1.4 Relevant RCS

Compliance with provisions set out in Regulations, Codes and Standards (RCS) is not a subject for debate. Safety planning must account for relevant Regulations, Codes and Standards (RCS), including international, national, and regional, as appropriate. Regulations establish minimum safety requirements. Nevertheless, compliance with the provisions of relevant RCS does not prevent to use new knowledge not yet included in RCS but published elsewhere.

Compliance with applicable regulations and referred standards is essential for ensuring public confidence in hydrogen projects, particularly for those demonstrating or deploying new technologies. Where strict compliance for a specific design, installation, and/or operation cannot be achieved, and alternatives are proposed, a sound technical basis should be formally agreed upon by all the relevant parties, including authorities. Relevant European Regulations and international standards are listed in Appendix 2. It should be recognised that some RCS require safety testing which needs to be adhered to.

As stated above, projects should recognise that current RCS does not fully answer all safety questions, especially when new systems, processes and infrastructure are to be developed and demonstrated. In such situations, hydrogen safety research and engineering of a system/infrastructure are seen as the only way forward.

Project teams should consult local authorities, including fire service early in the project. Early engagement will facilitate a greater understanding of the local requirements, which in some cases could be more restrictive than European or national regulation.

So, the purpose of a safety plan is far beyond the identification of vulnerabilities, hazards and associated risks. Its monitored implementation combined with a profound understanding of hydrogen safety engineering and operational safety and open communication are key elements of proper safety management.

3.1.5 Best safety practices

The best practices and underpinning safety strategies relevant to the project should be reflected in the safety plan already at the initial stage, along with identified at that time system safety vulnerability, hazards and associated risks. Hazards and risk assessment procedures, e.g. as a part of hydrogen safety engineering of a system, process or infrastructure could be identified either at the preparatory stage or at the start of the project.

Appendix 3 gives examples of known best practices to implement safety strategies when preparing the safety plan. In this appendix, some further references to best practice summarized in RCS, databases and hydrogen safety guidelines developed by European projects are also provided. In particular, they include:

- Recommendations for the approval of hydrogen fuelling stations (the HyApproval project output).
- Guidelines for permitting of small to medium-sized stationary fuel cell systems (the HYPER project outcome).
- Framework for teaching hydrogen basic issues for public authorities (the HyFacts project output).
- European Guidelines on Inherently Safer Use of Hydrogen Indoors (the HyIndoor project outcome).
- European Guide for First Responders (the HyResponse project outcome).
- European Model Evaluation Protocol (the SUSANA project outcome).
- Safety assessment of liquid hydrogen production, transport and storage of LH2 on large scale (the IDEALHY project output).
- Venting of hydrogen-air deflagrations in containers accommodating hydrogen technologies (the HySEA project outcome).
- Recommendations for safe use of liquid hydrogen (the PRESLHY project output).

- Recommendations for hydrogen driven vehicles and transport through tunnels and similar confined spaces such as underground parking (the HyTunnel-CS project output).

More hydrogen safety guidelines will be available after the completion of the Clean Hydrogen JU MultHyFuel project dedicated to the safety and permitting for Hydrogen at Multifuel Retail (expected in mid-2024).

3.1.6 Schedule of the safety plan update and reporting

It is recommended that an initial (draft) safety plan is developed at the preparatory stage of the project, which should be fully developed at the beginning of the project and then updated regularly reflecting the progress in hydrogen safety provisions in the project delivery and of its outcomes, i.e. systems, processes and/or infrastructure elements.

3.1.7 Composition, responsibilities and reporting schedule of a safety team

The project safety team should include representatives having education, training and experience in dealing with safety issues. The team can be composed of two groups of members, the technical team responsible for solving challenging hydrogen safety issues and the operational management team dealing with overall safety arrangements beyond the specific hydrogen safety issue. The composition and responsibilities of both groups should be identified at the initial stage (at least at the level of organisations if no decision yet is taken on personalities). External safety experts and representatives of local authorities and first responders could be co-opted to the project hydrogen safety team as appropriate.

The technical safety team will perform hydrogen safety research and engineering and relevant activities described in the safety plan. It is recommended that the technical team includes the experienced safety representative of the project coordinator, hydrogen safety researchers and experts, technology developers, system designer and integrator, field engineers and technicians, local fire brigade representatives, etc. The main goal of the technical safety team is the identification of safety problems and formulation of potential incident scenarios, performing hydrogen safety engineering by contemporary methods and tools, e.g. validated CFD and FEM models, to assess consequences of incidents to people, property and environment, and reporting results as appropriate.

The responsibilities of the operational management team include planning, monitoring and reporting on arrangements of safety based on established general safety procedures available at each organization involved in the project. The composition of this group of safety professionals does not require pre-existent knowledge and expertise in hydrogen safety. The close work together of the technical and the operational management team will disseminate hydrogen safety culture and knowledge to a wider number of stakeholders whose work is related to safety.

The results of the safety studies and general safety provisions have to be reported throughout the project by both parts of the safety team, i.e. technical and operational management team.

3.2 Description of technical hydrogen safety activities

3.2.1 Identification of safety vulnerabilities, hazards and associated risks

Identification of safety vulnerabilities and hazards by the safety team precedes the development of scenarios to be investigated by the safety engineering sub-group. At

this stage the consortium can use different approaches and hazard identification methodologies and it should be clear to the team that the focus should be on hydrogen safety engineering/design as uncertainties in risk assessment for emerging technologies could be so huge that the usefulness of the quantitative risk assessment (QRA) could be questioned, and the risk assessment exercise could be used only as a method of identification of safety vulnerabilities and hazards.

The safety plan should demonstrate that the consortium partners know the state-of-the-art in the project area. The track record and experience of some partners in hydrogen safety research and engineering (as relevant to a particular project) is an added value to the project and could underpin the development of competitive inherently safer processes and systems.

3.2.2 Selection of incident scenarios

Development of incident scenarios using identified-by-the-team vulnerabilities and hazards of a system or a process or infrastructure is an important part of safety studies on assessment of consequences of incidents and thus evaluation of risk for life and property loss.

3.2.3 Content and methods of hydrogen safety engineering to be applied

The scope of hydrogen safety engineering work, hazard, risk and safety assessments, to be performed in the project should be formulated and presented in the safety plan. The methods of hydrogen safety engineering to be applied should be described if they were already defined (preparatory stage) or applied (regular updates of the safety plan). The professional safety experts within the team could apply a combination of theoretical, numerical and experimental methods. To perform consequences analysis of scenarios selected by the safety team, these experts could use deterministic, comparative and probabilistic methods or any combination of these elements.

3.2.4 Prevention and mitigation strategies and innovative engineering solutions

Hydrogen is not more or less dangerous compared to other fuels provided it is dealt with professionally. A strong indicator of safety professionalism is the ability of the project team to develop breakthrough safety strategies and innovative engineering solutions that are necessary to produce competitive on the market products. In general, it is more efficient to invest in the engineering of an inherently safer system rather than spend time and money on quantitative risk assessment in circumstances when there are no failure statistics available for emerging technologies. The last statement does not belittle the risk assessment but indicates a stronger role of engineering in the development of inherently safer hydrogen technologies.

3.2.5 Reporting results on hydrogen safety engineering progress and risk assessment as applicable

Reporting of results is the final stage of the important management principle “plan - monitor - report”. The safety plan should be prepared in the way that its monitoring and reporting are clearly defined both in timing and expected results at the particular stage.

3.3 Description of organisational safety activities

3.3.1 Description of work to be performed by staff that needs formal safety procedures

The safety plan should describe how the safety policies and procedures of the organisations involved in a project are implemented for the work being performed. Project team members' involvement is important in the development and implementation of a comprehensive project safety plan, its monitoring and reporting as required.

All project phases should be addressed as applicable in the safety plan and during its implementation. The plan should list existing and planned design, installation/commissioning, operations, and maintenance procedures that describe the steps for the system, apparatus, equipment, facility, etc. It should also reference specific safe work practices used to control hazards during operations such as lockout, confined space entry, opening equipment or piping, and control over entrance into a facility by maintenance, contractor, laboratory, or other support personnel.

There are established formal procedures for performing hazardous operations and research in organisations. They must be followed. These works could and could not include dealing with hydrogen. In case of hydrogen being involved in the operation the close collaboration with the technical team, which ideally includes persons skilful in hydrogen safety, is encouraged. Other hazardous operations that exclude the use of hydrogen must be performed following the established safety guidelines and procedures. The whole chain of project activities should be detailed in the safety plan. This could include but is not limited to consideration of:

- operating steps;
- sample handling and transport;
- equipment and mechanical Integrity;
- other relevant work components.

Procedures should be updated promptly to reflect changes to chemicals and other materials, equipment, technologies and facilities.

Sample handling and transport

The plan should discuss any anticipated transport of products and materials and identify the relevant policies and procedures that are in place to ensure their proper handling.

Equipment and mechanical integrity

The plan should describe how the integrity of equipment, piping, tubing, and other devices associated with the hazardous material handling systems will be assured during operation. An important ingredient in this regard is the plan for regular checks and inspections. Other elements are listed in the box below.

Background Information on equipment and mechanical integrity may consist of:

- Written procedures.
- Proper design, testing, commissioning, use and decommissioning.
- Use of fail-safe features.
- Validation of materials compatibility.
- Preventative maintenance plan.
- Signed installation protocols, checks respectively.

- Calibration of safety-related devices. The frequency should be consistent with applicable manufacturers' recommendations, adjusted as indicated by operating experience.
- Testing and inspection. The types and frequency of inspections and testing should be consistent with applicable manufacturers' recommendations, adjusted as indicated by operating experience.
- Training for maintenance, calibration, testing, and inspection personnel.
- Documentation. Each calibration, inspection, and test should be recorded. Typical records include the date, name of the person, an identifier of the device, description of what was done, and results. Any deficiencies outside acceptable limits should be highlighted.
- Correcting deficiencies that are outside acceptable limits.

Procedures should be developed for each laboratory-scale or plant process with the active involvement of the project team members. The written procedures should provide instructions on how to safely conduct the operations. The procedures should include:

- Steps for each operating phase, such as start-up, normal operation, normal and emergency shutdown.
- Operating limits.
- Safety considerations, such as precautions necessary to prevent exposure.
- Measures to be taken if physical contact or airborne exposure to hazard occurs.
- Safety systems and their functions.

3.3.2 General safety considerations to prevent harm to people in a workplace

This section could be prepared as a stand-alone section or could be embedded into the previous one with the description of an overall work to be performed that requires adherence to established formal procedures.

3.3.3 Personnel training and education plan

Hydrogen technologies is an emerging area. The number of specialists in a particular area is growing yet can be limited. Training and education programmes are under development. This is probably even more relevant to hydrogen safety. The above underlines the importance of not only having educated in hydrogen safety personnel but a structured plan for training and education of as many persons as possible. It could be done at different levels, e.g. technicians and engineers, through established educational and training programmes at universities and colleges, continuous professional development (CPD) courses, ad-hoc training events tailored to the project needs, etc.

The personnel training and education plan should describe planned educational safety programs and training related to the hazards associated with the project delivery. It should describe how each partner administers the engagement of staff in hydrogen safety education and training, how the participation is recorded and the growing level of hydrogen safety knowledge is verified. Both external education/training of “trainers”, e.g. through the CPD route, and internal training of personnel have to be described.

Background information and elements related to training and education.

- Initial training that includes an overview of the system/process/infrastructure, a thorough understanding of operating procedures with emphasis on the specific for

hydrogen safety and health hazards, emergency operations including shutdown, and safe work practices applicable to the personnel's job tasks.

- Refresher training that is provided to all personnel involved in operating a process to assure that the personnel understand and adhere to the current standard operating procedures.
- Training documentation that shows all personnel involved in operating a process has received and understood the training.
- For people maintaining process equipment, performing calibrations, etc., the training needs to ensure that a person can safely perform the job tasks.

3.3.4 Safety review procedures and/or self-audits

The project safety plan and the report on its delivery could include safety reviews that are conducted, as part of the hydrogen safety engineering approach during the system/process/infrastructure design stage, development and testing, and finally demonstration and operational phases, see also Figure 4-1. The involvement and responsibilities of individual project staff members in such reviews, and when and how the reviews will be documented should be included. In most cases, the safety reviews conducted for a project could include the following:

- **Early project ISV.** The identification and safety vulnerabilities (ISV) and hazards early in the project to identify major safety concerns that may affect the cost, timing and safety aspects of the project outcomes.
- **Design stage ISV.** The identification of safety vulnerabilities and hazards when the design is nearly complete to identify safety concerns related to the details of the project.
- **Pre-start-up safety review.** A review to make sure that all the hazards and risk reduction plans have been implemented and that all appropriate examination, inspection, and testing have been completed.
- **Other safety reviews.** Reviews that may be needed during the life of the project, including those required by organisational policies and procedures, must be included in the safety plan report.

The development of prevention and mitigation measures is usually done in conjunction with the ISV, which identifies vulnerabilities and hazards, defines potential incident scenarios. The purpose of a mitigation plan is to eliminate or reduce significant hazards and associated risks. The plan should describe prevention and mitigation measures for the significant safety vulnerabilities previously identified. Mitigation addresses all phenomena that can result in pressure and thermal effects harming people and damaging property and the environment: unignited hydrogen releases and effects of ventilation and/or inerting, safety strategies to limit flammable atmospheres, etc.; proper ways of dealing with ignition and extinction, including cases when the ignition is desirable to exclude accumulation, e.g. releases through discharge line from a thermally-activated pressure relief device (TPRD); ignited releases (jet fires); mitigation of deflagrations by venting technique; prevention of DDT and detonation; prevention of tank rupture in a fire to exclude blast wave, fireball and projectiles, etc.

The mitigation systems could be active and passive. The general rule for an integrated fire and explosion protection system is the demonstration that in case of failure of the active system the passive protective system still will provide the reduction of hazards and associated risks to the acceptable level.

The plan should describe how the project team will verify that safety-related procedures and practices are being followed through the duration of the project and continued for the forthcoming use of the equipment, system, process or infrastructure.

3.3.5 Emergency response arrangements

The safety plan should describe the emergency response procedures that are in place, including communication and interaction with neighbouring occupancies and local emergency response officials. A suitably trained emergency response force is an essential component of a viable deployment of hydrogen system and/or infrastructure. The project personnel need to understand how to respond to an incident.

The project team should work with their local first and second responders to inform them about hazards and associated risks. The project team should inform the first responders about available training materials and platforms relevant to hydrogen technologies, e.g. outcomes of HyResponse⁵ and HyResponder⁶ projects, including the e-Laboratory of Hydrogen Safety, and similar overseas resources like the H2Tools in the USA⁷. These include not only information on the physical properties and hazards of hydrogen itself, intervention tactics and strategies, but also technical details and specific hazards associated with the hydrogen systems, e.g. high-pressure equipment, electrolysers, electrical circuits, etc.

Due to fast progress in emerging hydrogen technologies, including breakthrough safety technologies, the safety experts and responders are encouraged to undergo continuous professional development (CPD) training. The project team has to engage with local responders at the earliest convenience, i.e. at the preparatory stage. The responders should be made aware of the available education and training opportunities, including those listed in the observatory of the Clean Hydrogen JU⁸.

The training of the relevant partners' staff must always be done in coordination with the external emergency services. The interaction with emergency services starts with hazards and associated risk analysis and follow-up management. The hazards and risks are excluded as much as possible. The focus is then on the prevention of incidents at the installation and/or plant. This is in addition to frequent joint training of emergency procedures in the form of incident/disaster drills. The training together with professionally prepared well in advance rescue information (intervention plans and procedures, emergency and evacuation plans) is crucial to success. These plans should be prepared and updated based on critical and relevant technical information discussed between the project team and local emergency services as relevant. The installation details and the specific emergency operation procedures for different incident scenarios must be known to the intervening emergency service. Dedicated consultations, e.g.

⁵ <http://www.hyresponse.eu/>

⁶ <https://hyresponder.eu/>

⁷ <http://h2tools.org/fr/nt/> and <https://h2tools.org/firstresponder>

⁸ <https://www.fchobservatory.eu/observatory/education-and-training>

regarding the installation of a draining system in the construction plans of the plant, and joint exercises and training are very important to tackle successfully incidents if they happen.

3.3.6 Management of Change (MOC) procedures

The plan should describe the method that will be used to review proposed changes to materials, technology, equipment, procedures, personnel, and facility operation for their effect on safety vulnerabilities. The MOC procedure should identify the appropriate project team members that are making a suggestion (with reasoning) and who must approve changes. All materials or equipment that is replaced “in-kind” should be reviewed. For example, if a regulator was replaced the item with a different model or one that was constructed of a different material, that would require a documented management of change. Changes to operating procedures would also be handled as a MOC to help avoid unanticipated safety concerns. A MOC review is required for any change that affects the original hazard identification, risk assessment or system safeguards.

3.3.7 Reporting on safety management and lessons learnt

Knowledge gained throughout a project can be an important asset in the effective safety provisions within the project and beyond its formal duration. The reporting should describe the progress in safety operations and management. It could include the comparison of previously applied and developed during the project inherently safer arrangements, the effect of the degree of experience of the personnel, including education and training in hydrogen safety, etc.

The plan should describe how safety events, i.e. incidents and near-misses, will be handled by the team. The plan description should include:

- The reporting procedure within the organisation.
- The method and procedure used to investigate events.
- How corrective measures will be implemented.
- How lessons learned from incidents and near-misses are documented and disseminated, e.g. through the hydrogen incident databases (HIAD 2.0 and HELLEN) managed by the Joint Research Centre.

By learning about the likelihood, severity, causal factors, setting, and relevant circumstances regarding safety events, teams are better equipped to prevent similar, perhaps more serious, events in the future. To be effective, this process requires a thorough investigation, a comprehensive report, and a great deal of information sharing as openly and thoroughly as possible.

An **incident** is an event that results in:

- Loss of time incident and/or injury to personnel.
- Damage to project equipment, facilities or other property.
- Impact on the public or environment.

A **near-miss** is an event that, under slightly different circumstances, could have become an incident. Examples include:

- Any unintentional hydrogen release that ignites, or is enough to sustain a flame if ignited and does not fit the definition for an incident.
- Any hydrogen release that accumulates above 25% of the lower hydrogen flammability limits in the air within an enclosed space and does not fit the definition of an incident.

Incidents with major damage, injuries or losses of life will initiate public investigations. Here national regulation will impose procedures which are not controlled by the project partners.

Background Information.

The investigation of a near-miss or an incident should be initiated as promptly as possible. An event investigation team should preferably consist of at least one member who is independent of the project team, at least one person knowledgeable in the process chemistry and actual operation of the equipment and process, and other persons with the right knowledge in hydrogen safety and experience to thoroughly investigate and analyse the incident. The event report should include:

- Date
- Cause of the event
- Searchable keywords
- Summary of the event
- The severity of the event
- Lessons learnt
- Possible measures to prevent the event
- Possible measures to mitigate the event
- The information available on rescue and firefighting actions
- If the event was caused by the failure of a specific part, what might have been done to prevent this?
- What short- and long-term solutions should be put in practice to prevent and mitigate such events?
- References

The team should promptly address and resolve the incident report findings and recommendations. Resolutions and corrective actions should be documented in the JRC database HIAD 2.0⁹.

Sharing information on safety related experience, including lessons learnt and consequences of incidents, frequency, technical details and the effect of human factors are of paramount importance for the effective deployment of safe hydrogen systems and infrastructure. This information shall be reported regularly, for example along with the updated safety plan.

3.3.8 Project safety documentation

During the project preparation, the following documentation on safety should be prepared, maintained and updated as required.

Project safety documentation includes:

- Information about the technology of the project:
 - A block flow diagram or simplified process flow diagram, PID (see Appendix 6. “Additional notes on a safety plan”).
 - Process chemistry if applicable.
 - Maximum intended inventory of materials, including intermediates if any.

⁹ HIAD 2.0 is temporarily not accessible online. You can access the most recent dataset at : JRC-PTT-H2SAFETY@ec.europa.eu

- Nominal and safe upper and lower limits of critical process parameters for such items as temperatures, pressures, flows, and concentrations.
- An evaluation of the consequences of deviations, including those affecting the safety and health of personnel.
- Information about the equipment or apparatus:
 - Materials of construction.
 - Material and energy balances.
 - Electrical classification.
 - Pressure relief system design and design basis.
 - Ventilation system design.
 - Design codes and standards employed.
 - Alternatives to the use of listed equipment.
 - Safety check before starting.
- Map of ATEX zones, e.g. drawings of zones 0 and 1, is included in the installation plan when justified.
- Safety systems, e.g. alarms, interlocks, detection or suppression systems.
- Procedures to follow in case of emergency. This should cover aspects like equipment shut down, hydrogen isolation, activation, etc.
- Safety review documentation, including the ISV, hazards and associated risk assessment.
- Operating procedures, including response to deviation during operation, management of change document.
- Material Safety Data Sheets.
- References such as handbooks and RCS.
- Siting issues (alternatives to required setbacks).

Safety documentation should be updated regularly to reflect changes to chemicals/other materials and their quantities, equipment, technologies, and facilities.

Additionally, the safety plan should describe how the project safety documentation and the plan itself is maintained, including who is responsible, where documents are kept, and how it is accessed by team members. A one-page summary should be available on-site for easy consultation by the personnel responsible for handling relevant equipment and systems.

3.4 Other relevant documentation, safety procedures and outreach activities

3.4.1 Positive data reporting

Not only the “negative” data on mishaps and incidents is relevant, but also the “positive” data about phases, distances, and cycles with perfect as designed operations are important for providing a reference. In most cases, however, these data are requested within the regular project reporting anyhow. Integrating this reporting in your safety management reporting will help deriving appropriate statistics and a more complete and balanced view on the safety performance in general.

3.4.2 Crisis management procedures

There might be the need to detail and prepare information material for any incident. This could include information material for upper management, general public and media. Also recommendation for cleaning up the concerned area and for fast recovery of operations could be compiled.

3.4.3 Dissemination plan of project findings in hydrogen safety, including closed knowledge gaps and addressed technological bottlenecks

The project team is encouraged to include the plan of generation and sharing useful safety information beyond the project partners to all stakeholders as appropriate.

4 SAFETY PLAN IMPLEMENTATION, MONITORING AND REPORTING

The availability of a safety plan without a clear understanding of how the plan will be implemented, i.e. made effective, does not make sense. This chapter gives comments on the content of the safety plan that could assist with its implementation. It provides useful examples and best practices in the implementation of the safety plan.

The safety plan should unambiguously describe how it will be implemented, including its continuous monitoring and reporting in respective deliverables. Both the technical safety team and the operational safety management team implement their parts of the plan. The progress monitoring and intermediate/final reports on the safety plan delivery should be made available to all project partners and potentially to external partners, e.g. stakeholders, advisory board members, as applicable.

4.1 Performing safety reviews

For the safety reviews appropriate techniques for identifying hazards and vulnerabilities and, in case, for assessing risks must be chosen. The safety review is the formal mean for identifying potential hazards and safety issues associated with process steps, materials, equipment, operations, facilities, personnel, etc including laboratory, bench or pilot/demonstration scale. The hazards, risk and safety assessments typically try to quantify the risks and discriminate acceptable and non-acceptable risk with appropriate acceptance criteria. The safety reviews, disregarding what type of, must be documented. This documentation should include at least the following:

- The selected safety review method(s).
- The leader of the safety review team and the team composition.
- The responsible person to implement the results of the review and assisting team composition.
- Incident scenarios identified as a part of ISV exercise, e.g. high consequence low-frequency events, etc.
- Significant hazards, vulnerabilities and, in case, associated risks identified.
- Safety-critical equipment, processes, elements of infrastructure, etc.

The first safety review should address at least the following questions:

- What are the protection targets?
- What hazard associated with a system design, installation, or operation is likely to result in an incident?
- What hazard has the potential to result in a worst-case scenario?

Hazards are typically associated with an inventory of hazardous materials, potential energy in storage that can be calculated as a product of volume and pressure, and hazardous actions, that cannot be excluded because they are implied by the technological process.

Hazardous materials. The plan should discuss the storage and handling of hazardous materials and related topics including possible leaks and accumulation, ignition sources, fire and explosion hazards, material interactions, the likelihood of creating a combustible mixture, the potential for overpressure, and detection. For hydrogen handling systems, the plan should describe the source and supply, storage and distribution systems including volumes, pressures, state (gaseous or liquid) and estimated use rates, typical flow rates.

Safety vulnerabilities are those elements of a system or a process that allow a hazard to realise. For all ISV methods, it is essential to identify all potential failure modes and associated hazards.

Failure modes. In general, a good safety plan identifies immediate (primary) failure modes as well as secondary failure modes that may come about because of other failures. For effective safety planning, an attempt is made to identify every conceivable failure, from catastrophic failures to benign collateral failures. Identification and discussion of perceived benign failures may lead to the identification of more serious potential failures.

The method used for the first safety review is often different from the methods used for the later reviews. This comes naturally with the development process and with more details available when the design of the system matures. Typical safety review (or ISV) and risk assessment methods are described in

Appendix 4. “Methods for identification of safety vulnerabilities, hazards and risk assessment”.

4.2 Implementation of hydrogen safety engineering process

Hydrogen safety engineering is defined as an application of scientific and engineering principles to the protection of life, property and environment from adverse effects of incidents involving hydrogen¹⁰. It is seen as the most efficient way of developing inherently safer systems, processes and infrastructure in emerging technical areas where RCS is in the process of development and for this reason not sufficient to fully underpin safe design and operations.

The hydrogen safety engineering process includes three main steps shown in Figure 4-1. Firstly, a qualitative design review (QDR) is undertaken by a safety team. The team can include project managers, owners, hydrogen safety engineers, architects and designers, representatives of authorities having jurisdiction, e.g. emergency services, and other stakeholders. The team defines incident scenarios, e.g. by undertaking ISV reviews, suggests trial safety designs, and formulates acceptance criteria. Secondly, quantitative safety analysis of the selected scenarios and trial designs is carried out by qualified hydrogen safety engineer(s) using state-of-the-art knowledge in hydrogen safety science and engineering and validated models and tools. Thirdly, the performance of the hydrogen system under the trial safety designs is assessed against predefined acceptance criteria.

¹⁰ Fundamentals of hydrogen safety engineering, free download eBook, www.bookboon.com, 2012.

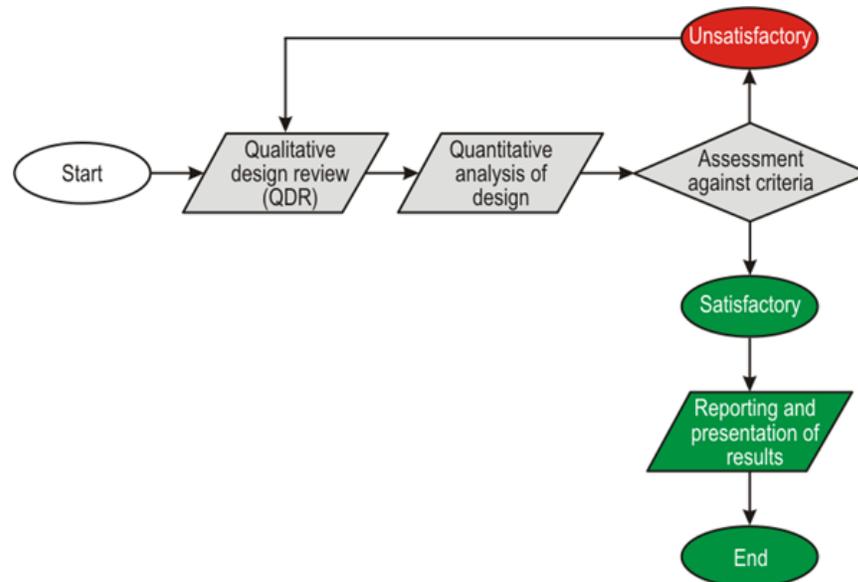


Figure 4-1: The schematic presentation of the hydrogen safety engineering process

The QDR is a qualitative process based on the team’s experience and knowledge. It allows its members to establish a range of safety strategies and propose engineering solutions. Ideally, QDR has to be carried out early in the design process and in a systematic way, so that any substantial findings and relevant items can be incorporated into the design of the hydrogen system, process or infrastructure before the working drawings are developed. In practice, however, the QDR process is likely to involve some iterations as the design process moves from a broad concept to greater detail.

Safety objectives should be defined during the QDR. They should be appropriate to the particular aspects of the system design, as hydrogen safety engineering may be used either to develop a complete hydrogen safety strategy or to consider only one aspect of the design.

The main hydrogen safety objectives are safety of life, loss control and environmental protection. The QDR team should establish one or more trial safety designs taking into consideration selected incident scenario(s). The different designs could satisfy the same safety objectives and should be compared with each other in terms of cost-effectiveness and practicability. At first glance, trial designs must limit hazards by implementing preventive measures and ensuring the reduction of severity and frequency of consequences (thus aiming to the reduction of associated risks). Although hydrogen safety engineering provides a degree of freedom, it is mandatory to fully respect relevant regulations when defining trial designs.

The QDR team has to establish the acceptance criteria against which the performance of a design can be judged. Three main methods can be used: deterministic, comparative, and probabilistic. Depending on trial designs, the QDR team can define acceptance criteria following all three methods. The QDR team should provide a set of qualitative outputs to be used in the quantitative analysis: results of the architectural review; hydrogen safety objectives; significant

hazards and associated phenomena; specifications of the scenarios for analysis; one or more trial designs; acceptance criteria and suggested methods of analysis. Following QDR, the team should decide which trial design(s) is likely to be optimum. The team should then decide whether the quantitative analysis is necessary to demonstrate that the design meets the hydrogen safety objective(s).

Following the QDR, a quantitative analysis may be carried out using for example validated contemporary models and tools where various aspects of the analysis can be quantified by a deterministic or a probabilistic study. The quantification process is preceded by the QDR procedure for two main reasons: (1) to ensure that the problem is fully understood and that the analysis addresses the relevant aspects of the hydrogen safety system, and (2) to simplify the problem and minimise the calculation effort required. Besides, the QDR team should identify appropriate methods of analysis among the following: simple engineering calculations; CFD and/or FEM simulations; simple or full probabilistic study, etc. A deterministic study using comparative criteria will generally require fewer data and resources than a probabilistic approach and is likely to be the simplest method of achieving an acceptable design. A full probabilistic study is only likely to be justified when a substantially new approach to hydrogen system design or hydrogen safety practice is being adopted. The analysis may be a combination of some deterministic and some probabilistic elements.

Following the quantitative analysis, the results should be compared with the acceptance criteria identified during the QDR exercise. Three basic types of approach can be considered to assess the performance of safety system against acceptance criteria:

- The deterministic approach shows that based on the initial assumptions a defined set of conditions will not occur.
- The comparative approach shows that the design provides a level of safety equivalent to that in similar systems and/or conforms to prescriptive codes (as an alternative to performance-based hydrogen safety engineering process).
- The probabilistic approach shows that the risk of a given event occurring is acceptably low, e.g. equal or below the established risk for similar existing systems.

If none of the trial designs developed by the QDR team satisfies the specified acceptance criteria, QDR and quantification process should be repeated until a hydrogen safety strategy satisfies acceptance criteria and other design requirements. Several options can be considered when re-conducting QDR following the existing recommendations: development of additional trial designs; adoption of the more discriminating design approach, e.g. using deterministic techniques instead of a comparative study; re-evaluation of design objectives, e.g. if the cost of hydrogen safety measures for property loss prevention outweighs the potential benefits. When a satisfactory solution has been identified, it should be fully documented. Depending on the particularities and scope of the hydrogen safety engineering study, the reporting of the results and findings could contain the following information:

- Objectives of the study;
- Description of the hydrogen system/process/infrastructure;
- Results of the QDR;
- Quantitative analysis, including assumptions; engineering judgments; calculation procedures; validation of methodologies; sensitivity analysis, etc.;
- Assessment of analysis results against criteria;

- Conclusions: hydrogen safety strategy; engineering solutions; management requirements; any limitations on use, etc.;
- References, e.g. drawings, design documentation, technical literature, etc.

To simplify the evaluation of a hydrogen safety engineering design, the quantification process can be broken down into several technical sub-systems (TSSs). The following requirements should be accounted for the development of individual TSS:

- TSS should together, as reasonably as possible, cover all possible aspects of hydrogen safety engineering.
- TSS should be balanced between their uniqueness or capacity to be used individually and their complementarities and synergies with other TSSs.
- TSS should be a selection of state-of-the-art in the particular field of hydrogen safety, validated engineering tools, including empirical and semi-empirical correlations and contemporary tools such as validated CFD and FEM models.
- TSS should be flexible to allow the update of existing or use of new appropriate and validated methods, reflecting recent progress in hydrogen safety science and engineering.

The following TSSs can be considered:

- Initiation of release and dispersion.
- Ignitions and extinction, e.g. flame blow-off with reduction of pressure in the storage due to blowdown.
- Deflagrations, a transition from deflagration to detonation (DDT), and detonations.
- Fires.
- The blast wave, fireball and projectiles after hydrogen storage tank rupture in a fire.
- Safety strategies, including prevention and mitigation techniques.
- Emergency services intervention.

Practically all TSS should include consideration of both pressure and thermal effects that harm people and damage property and the environment.

Hydrogen safety engineering is a powerful tool for the provision of hydrogen safety by qualified specialists in the growing market of hydrogen systems and infrastructure. Last but not least, hydrogen safety engineering can secure a high level of competitiveness for hydrogen and fuel cell technologies.

4.3 Examples of best practices in hydrogen safety engineering

The safety plan is expected to incorporate best practices in hydrogen safety engineering, including well-established safety principles. Examples of such best practices are presented and shortly described in this section.

Best practice or safety principles are presented along with prototypical sequences of events characterising an incident with a flammable gas like hydrogen. The corresponding phenomena and consequences diagram developed by the pre-normative research HyIndoor project and

included in the project guidelines is shown in Figure 4-2. It is focused on fire scenarios with the use of hydrogen in an enclosure. Scenarios in closed rooms are more critical than scenarios in the free/outdoor and cover conservatively those cases. The quantitative assessment of hazards of these phenomena and their consequences can represent a central part of your safety review (or ISV), safety assessment or hydrogen safety engineering.

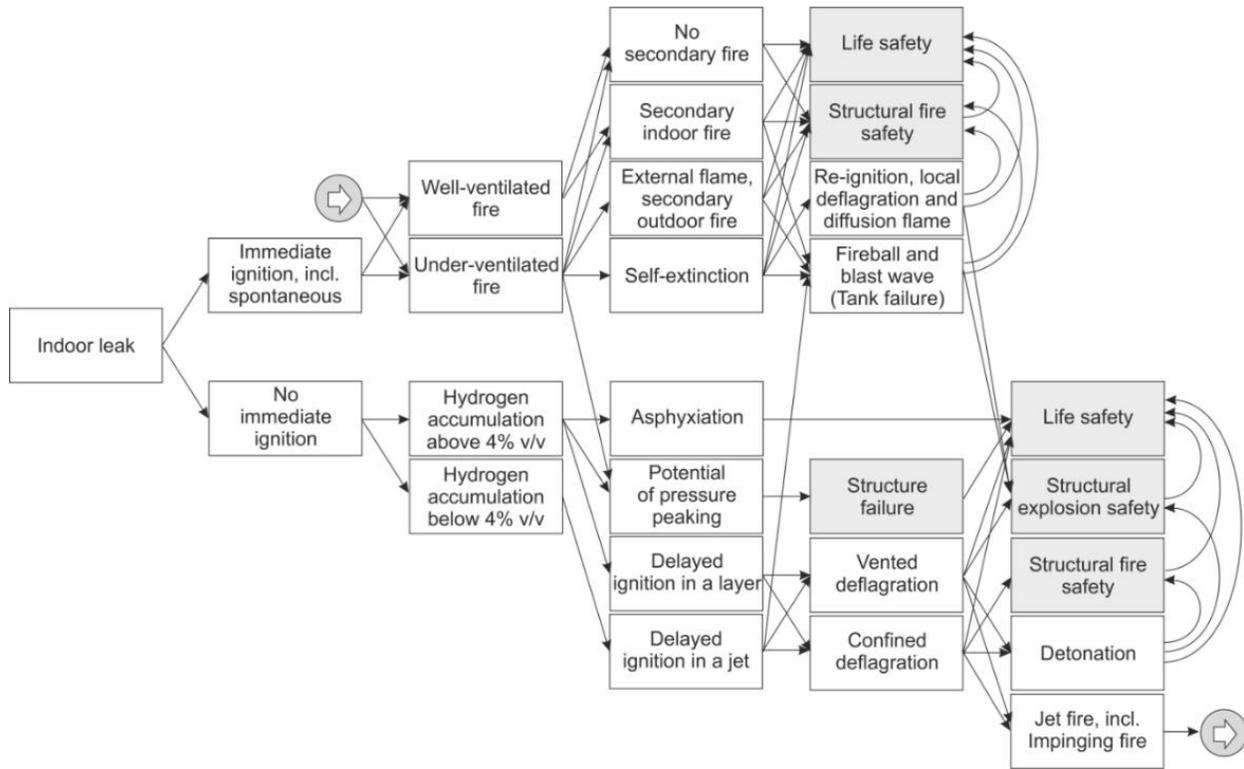


Figure 4-2. Phenomena and consequences diagram for indoor use of hydrogen.

White boxes in Figure 4-2 represent various phenomena, starting with the development of hydrogen leak, and grey boxes show potential consequences. Note that even if no immediate ignition has occurred (lower branch), a subsequent chain of events can lead to delayed ignition leading to a transition to the upper branch, as indicated by the arrow in circle pictograms.

The example of a prototypical gas explosion, contained in the lower part of Figure 4-2, is shown additionally as an escalating event in Figure 4-3. Best safety practices recommend either to remove or at least limit the effects of essential elements in this chain of events (represented as blocks in Figure 4-3) or introduce barriers at the transitional stages (represented as red vertical bars in Figure 4-3). Acting on a single block can reduce the hazards and associated risks, limit the consequences or even prevent an incident. However, the earlier the escalation path is interrupted by a barrier (the further to the left in Figure 4-3 we are), the more efficient and cost-effective is the prevention/mitigation safety system.

It should be noted that even if the escalation may be stopped successfully at an early stage, certain hazards still will exist (see again Figure 4-2). A comparatively small unignited release or a jet fire, for instance, will not generate

destructive explosion loads but still imply thermal loads that should be addressed to exclude the “domino effect” in the development of the incident.

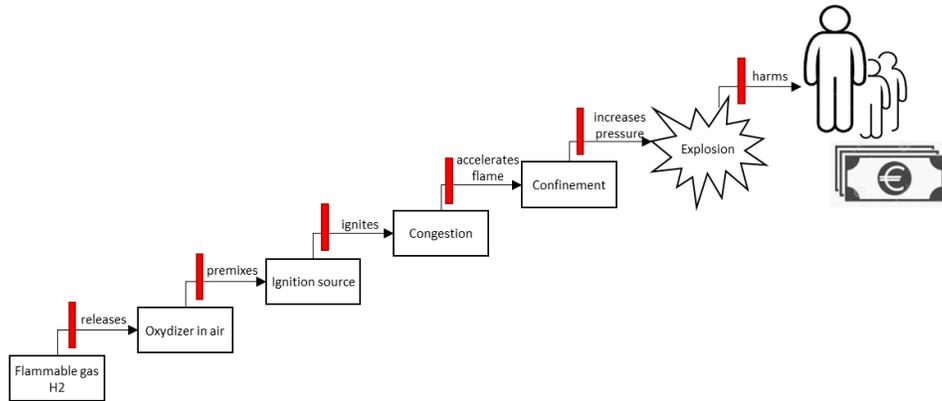


Figure 4-3: Example of escalation path in a gas explosion incident with potential barriers indicated as red barriers.

Developed by the international hydrogen safety community, safety strategies and derived safety strategies serve as hazard and associated risk-reducing measures on the various elements of the chain of events. The list of several widely used safety strategies is presented in Table 4-1. The list is not exhaustive and the development of innovative safety strategies and engineering solutions during the project delivery is expected to further improve the competitiveness of the project outputs, make them inherently safer and provide a level of life safety, property and environmental protection at least at the same level or higher compared to existing fossil fuel technologies.

Table 4-1. The widely used safety principles/strategies and organisational measures.

No.	Exemplars of safety principles/strategies
0	Proper design and material selection for hydrogen application
1	Limit hydrogen inventories, especially indoors, to what is technologically necessary.
2	Avoid/limit the formation of a flammable mixture, e.g. by using ventilation or reducing release size.
3	Carry out ATEX zoning analysis.
4	Combine hydrogen leak or fire detection and counter-measures.
5	Avoid ignition sources using proper materials or devices in different ATEX zones, remove electrical systems where appropriate or provide electrical grounding, etc.
6	Avoid congestion. Reduce turbulence promoting flow obstacles in respective ATEX zones.
7	Avoid confinement. Place storage in the open if possible or use proper size openings in the enclosure.
8	Provide efficient passive barriers in case of active barriers deactivation for whatever reason.
9*	Train and educate staff in hydrogen safety to establish a new hydrogen safety culture.
10*	Report near misses and incidents to databases and include lessons learned in your documentation.
11*	Perform periodic maintenance and audit of hydrogen installations

Note: * - organisational measures.

It should be noted that the ATEX regulations, which is referred to in safety strategies 3 and 4 and highlighted also as one of the compulsory legal frameworks in Appendix 2, provides valuable guidance for safety provisions. It is worth noting that the simple mentioning of named safety strategies in the draft safety plan at the proposal stage does not replace the need for comprehensive hydrogen safety engineering within the project as appropriate for the project theme.

Some further best practices should account for the following issues, addressed in recent pre-normative research. The following phenomena and systems should be included into consideration during carrying out hydrogen safety engineering (description of mentioned below phenomena can be found elsewhere¹¹):

- Hydrogen release and dispersion, including effects of confinement and ventilation system. It should be taken into account that even unignited release could generate pressure loads, e.g. due to the pressure peaking phenomenon. The hazard of asphyxiation during the release in a confined space must be addressed. Frost bits by LH2 release has to be considered. An example of a safety strategy for unignited release is the exclusion of the formation of flammable cloud/layer under a ceiling of the enclosure, e.g. by a proper design of thermally activated pressure relief device (TPRD) diameter and location. This can be implemented by using the thoroughly validated for both expanded and under-expanded jets the similarity law.
- Ignition of hydrogen jet or hydrogen-air cloud, including the phenomenon of spontaneous ignition of sudden hydrogen release by the so-called diffusion mechanism when heated by a shock air interacts at the contact surface with expanding colder hydrogen. Ignition is associated with both thermal and pressure effects.
- Hydrogen jet fire generates as well both thermal and pressure loads. This is valid for the open space and especially pronounced in confined spaces. The free jet flame length for different conditions of release, i.e. storage pressure and diameter of release, can be calculated by the dimensionless correlation for flame length. Three hazard distances for free jet fires depend on hydrogen flame length, L_F , as: $x=3.5L_F$ for the “no-harm” hazard distance (70°C), $x=3 L_F$ for the “pain” hazard distance (115°C, 5 min), and $x=2 L_F$ for the “fatality” hazard distance (third-degree burns, 309°C, 20 s).
- Deflagration of turbulent hydrogen jet or flammable cloud generates pressure and thermal effects too. One of the worst-case scenarios is a transition from deflagration to detonation (DDT). It should be noted that while the venting technique is widely used to mitigate deflagrations and correlations for vent sizing are available for both localised non-uniform and uniform hydrogen-air deflagrations, this technique is not applicable to mitigate detonation.
- High-pressure hydrogen rupture in a fire is a “new” low-frequency high consequences scenario to be addressed. Tools to calculate fireball size and blast wave decay are available now both for the open atmosphere and in tunnels. The devastating consequences of tank rupture, i.e. blast wave, fireball and projectiles must be prevented by all means. Different safety technologies are available to prevent tank rupture. The burst of a pressurised vessel will lead to serious blast loads even without a chemical reaction, which, as was recently proved, contributes to the blast wave strength.

¹¹ Fundamentals of hydrogen safety engineering, free download eBook, www.bookboon.com, 2012.

- The development of innovative safety strategies and engineering solutions is a constituent part of hydrogen safety design. In most practical cases, especially confined spaces, the reduced models have limited applicability and contemporary validated CFD and FEM models should be applied along with the experimental studies to close still existing numerous knowledge gaps and technological bottlenecks in hydrogen safety.

Legal requirements and regulations, where they are available, must be accounted for in the safety plan preparation. The statistics of incidents and failure probabilities for hydrogen technologies are not yet fully available to the needed extent as for all emerging technologies. This makes the quantitative risk assessment of hydrogen systems and infrastructure difficult if not impossible to carry out due to huge uncertainties. Thus, it is recommended to focus on the engineering of inherently safer systems, including accounting for the safety principles and best practices, and demonstrate the progress beyond the state-of-the-art rather than invest most of the intellectual and financial resources only in the risk assessment. The hazards and associated risk assessment has to be carried out where appropriate and as required by RCS. This showed account, as well, the best practices and new knowledge, e.g. described in research papers relevant to the project topic.

4.4 Project safety documentation

Documents developed during the project preparation (see chapter 3.3.8) should be maintained and updated as required during project implementation.

5 EUROPEAN HYDROGEN SAFETY PANEL

In 2017 the FCH 2 JU, precursor of the Clean Hydrogen Joint Undertaking, launched the European Hydrogen Safety Panel (EHSP) initiative with the mission to assist the FCH 2 JU, both at the programme and project level, in assuring that hydrogen safety is adequately managed, and to disseminate hydrogen safety knowledge and culture to all stakeholders, including the general public. The EHSP members represent broad cross-sectorial and interdisciplinary areas of expertise by comprising representatives from industry, research, academia and first responders.

The panel's principal objective is to promote safer production, storage, handling and use of hydrogen in different systems and infrastructure across all technologies and applications. The EHSP contributes to this objective by:

- Reviewing annual and multi-annual working plans of Clean Hydrogen Joint Undertaking.
- Participating in safety reviews of project proposals.
- Guiding safety planning and implementation.
- Reviewing safety plans and project safety engineering solutions.
- Sharing and disseminating safety knowledge and best practices.
- Presenting safety as a priority for successful development, deployment and use of hydrogen technologies.
- Participating in incident/accident investigations.
- Enlarging and analysing the HIAD 2.0 database, and summarizing lessons learnt.
- Reviewing the progress achieved in the field of hydrogen safety in the projects funded by Clean Hydrogen Joint Undertaking.

The general EHSP approach is to focus on engagement, lessons learning from research and incident investigation, dissemination of knowledge and discussions rather than audit or regulatory exercises. The Panel is rather built on than duplicate the efforts of others, e.g.: standards development organisations (SDOs) and the International Association for Hydrogen Safety (IA HySafe).

The EHSP aim is to assist project teams in developing inherently safer approaches to design, operation, and maintenance of facilities that handle hydrogen through different mechanisms, e.g. guidance on the safety plan preparation and implementation, thematic workshops, etc. Pre-project reviews have the advantage of helping the proposal consortium to ensure their approaches and ideas of engineering designs are sound in sense of technological safety and are informed by the state-of-the-art in hydrogen safety engineering. Early design reviews provide more detail to consider, and opportunities to make technology improvements before resources are spent on hardware for the installation, etc. It may also be beneficial to re-engage with the EHSP even at later stages of the project to discuss unforeseen significant issues in the hazards and associated risks assessment or safety features because of changes from early design.

The EHSP is committed to assist in this regard and can provide an independent view. However, it is highly recommended that projects requiring professional knowledge in hydrogen safety

include partner(s) with relevant expertise not to jeopardize the quality of project outputs from the safety point of view.

Contact the EHSP via the

- EHSP Mailbox: EHSP@clean-hydrogen.europa.eu
- Website: [European Hydrogen Safety Panel \(europa.eu\)](http://European Hydrogen Safety Panel (europa.eu))

Appendix 1. Hydrogen safety terminology and abbreviations

ACH	Air changes per hour.
AFC	Alkaline Fuel Cell. A low-temperature fuel cell in which the electrolyte is potassium hydroxide (KOH) solved in water, where hydroxide ions (OH ⁻) are generated on the cathode and transported to the anode, where they oxidise hydrogen and generate product water.
ATEX	European Regulation related to explosive atmospheres (French „ATmospheres EXplosives“), which is split into manufacturing and operational requirements.
AWP	Annual Working Plan of the Clean Hydrogen JU.
Barg	Gauge pressure in bar.
Blast or Blast wave	The rapid change in air pressure that propagates away from the region of an explosion. A sharp jump in pressure is known as a shock wave and a slow rise is known as a compression wave. Weak pressure waves propagate with the speed of sound and shock waves always travel supersonically, i.e. faster than the speed of sound. A blast wave is produced because the explosive event displaces the surrounding air rapidly.
BLEVE	Boiling Liquid Expanding Vapour Explosion.
Boiling point	Temperature to which a fuel must be cooled to store and use as a liquid. The normal boiling point (NBP) of a liquid is the case in which the vapour pressure of the liquid equals the defined atmospheric pressure at sea level (1 atmosphere or 101325 Pa). The standard boiling point (SBP) is defined as the temperature at which boiling occurs under a pressure of 1 bar (100000 Pa).
CCH2	Cryo-Compressed Hydrogen.
CFD	Computational Fluid Dynamics.
CGH2 (sometimes CH2)	Compressed Gaseous Hydrogen.
CHP	Combined Heat and Power. Also known as cogeneration, CHP is the use of a power station to simultaneously generate both heat and electricity.
CNG	Compressed Natural Gas.
CPD	Continuous Professional Development.
Critical tube diameter (detonation)	The minimum diameter of a tube that will allow a detonation to diffract and continue into a larger volume as a self-sustained detonation wave. If the tube is smaller than this diameter, the detonation wave will "fail" when it emerges from the tube.
Critical Initiation Energy (detonation)	This is the smallest amount of energy deposition that will cause the direct initiation of a detonation wave.

Critical point	The critical point is composed of the critical temperature and critical pressure, which are 33 K and 13 bar for hydrogen. Above the critical temperature, no liquefaction might be achieved by pressurisation.
Cryogenic(s)	Corresponds to temperatures below 120 K.
DDT	Deflagration to Detonation Transition.
Deflagration and detonation	Deflagration and detonation are the propagation of a combustion zone at a velocity that is respectively less than and greater than the speed of sound in the unreacted mixture.
Detonation arrestor	A device, which can stop the progression of a detonation by imposing geometrical constraints.
EHSP	European Hydrogen Safety Panel.
Enthalpy	The sum of the internal energy of matter and the product of its volume and pressure. The units of enthalpy are Joules (J).
Entropy	A measure of the amount of energy in a physical system that cannot be used to do work. The units of entropy are Joules per Kelvin (J/K). An important law of physics, the second law of thermodynamics, states that the total entropy of any isolated thermodynamic system tends to increase over time, approaching a maximum value.
Equivalence ratio	The ratio of fuel to oxidizer divided by the same ratio at stoichiometric conditions.
Explosion	The sudden release of energy generating a blast wave.
FA	Flame acceleration
FC	Fuel Cell. A device that produces electricity through an electrochemical process, usually from hydrogen and oxygen.
FCEV sometimes also FCV	Fuel Cell Electric Vehicle. An electric vehicle that uses a fuel cell (in most cases a hydrogen fuel cell) for providing the main source of electricity for the drive train.
Clean Hydrogen JU	The European Clean Hydrogen Joint Undertaking
Fire point	The fire point is the minimum temperature of a liquid at which the evaporation rate is sufficient to sustain combustion.
Flame arrestor	A device, which can stop the progression of a flame by extracting heat from the combustion zone and combustion products.
Flame speed	The speed with which a flame, possibly turbulent, appears to move relative to a stationary observer. The flame speed can be much larger than the burning velocity due to the expansion of the combustion products.
Flammability limits	The range of pressure and temperature for which a flame propagation at a fixed composition mixture is possible.
Flammability range	A range of concentrations between the lower and the upper flammability limits.
Flash point	The minimum temperature at which the vapour above a liquid fuel will first support a combustion transient or "flash" if an ignition source is applied.
FMEA	Failure Mode and Effect Analysis is a standardised risk assessment method.

FRR	Fire Resistance Rating. A measure of time for which a passive fire protection system can withstand a standard fire resistance test, e.g. time from a standard fire test start until rupture of a composite pressure vessel without TPRD (failed or blocked TPRD) in the fire.
Fuel-air mass ratio	The ratio of the mass of fuel to the mass of air in the reactants.
FTA	Fault Tree Analysis is a standardised risk assessment method.
GH2	Gaseous Hydrogen.
H2	Hydrogen.
Harm	Adverse effect on people, property or environment.
Hazard	A potential source of harm (a chemical or physical condition that has the potential for causing damage to people, property and the environment).
Hazard distance	Hazard distance is a distance from the source of hazard to a determined (by physical or numerical modelling, or by a regulation physical effect value (normally, thermal or pressure) that may lead to a harm condition ranging from “no harm” to “max harm” to people, property or environment.
Hazard zone	An area where an explosive atmosphere might occur.
HAZID	HAZard IDentification is a standardised ISV method.
HAZOP	HAZard OPerability analysis is a standardised ISV method.
Heat of combustion	The energy that can be released by burning a unit amount of fuel; normally measured in J/kg of fuel.
HELLEN	The Database HELLEN (Hydrogen Events and Lessons LEarNed) is collecting incidents occurred during the execution of the projects funded by the Clean Hydrogen Joint Undertaking. HELLEN has the same structure and goals as HIAD, i.e. a repository of safety-related events, including a return or experience, aiming at recording and improving the safety dimension of the Joint Undertaking programme. Differently from HIAD, however, HELLEN's content is confidential, because it contains often unpublished data and the link to the organisations involved. The projects are committed to report to HELLEN. Every year, the JRC prepare a summary of the annual events for the Programme office of the Clean Hydrogen JU
HEV	Hybrid Electric Vehicle. A vehicle combining a battery-powered electric motor with a traditional internal combustion engine. The vehicle can run on either the battery or the ICE or both simultaneously, depending on the performance objectives for the vehicle.
HFS	Hydrogen Filling Station.
HHV	Higher Heating Value. The amount of heat released by a specified quantity of fuel (initially at 25°C) once it is combusted and the products have returned to a temperature of 25°C (condensed i.e. released latent heat of condensation). The HHV of hydrogen is 141.88 MJ/kg.
HIAD 2.0	Hydrogen Incident and Accident Database initially developed by the NoE HySafe (HIAD) and further maintained by JRC. HIAD 2.0 contains public data.

Hydrogen safety engineering	Application of scientific and engineering principles to the protection of life, property, and environment from adverse effects of incidents involving hydrogen.
ISV	Identification of Safety Vulnerabilities. Procedure for identification of potential shortcomings in response to hazards.
Ignition delay time	Time elapsed from the sudden increase in temperature until the ignition is observed.
Incident	An event that occurs casually in connection with something else and results in a loss or injury or should have resulted in an emergency response.
Impinging jet	A gas jet that hits a wall, ceiling, or obstacle.
Incident	Any unplanned event that resulted in injury or ill health of people, or damage or loss to property, plant, materials or the environment or a loss of business opportunity (ISO 19880-1:2020)
ICE	Internal Combustion Engine. An engine that converts the energy contained in fuel inside the engine into motion by combusting the fuel. Combustion engines use the pressure created by the expansion of combustion product gases to do mechanical work.
Jet fire	Fire of momentum-driven jet.
JRC	Joint Research Centre of the European Commission.
Laminar burning velocity	Rate of flame propagation relative to the unburned gas that is ahead of it, under stated conditions of mixture composition, temperature, and pressure of the unburned gas.
LFL	Lower Flammability Limit. It is 4% by volume of hydrogen in air at normal pressure and temperature conditions.
LHV	Lower Heating Value. The amount of heat released by combusting a specified quantity (initially at 25°C) and returning the temperature of the combustion products to 150°C. The units of LHV are joules per kilogram (J/kg). The LHV of hydrogen is 120 MJ/kg.
LH2	Liquefied Hydrogen or Liquid Hydrogen. Hydrogen in liquid form. Hydrogen can exist in a liquid state, but only at extremely cold temperatures. Liquid hydrogen typically has to be stored at 20 K (-253°C). The temperature requirements for liquid hydrogen storage necessitate expending energy to compress and chill the hydrogen into its liquid state.
LNG	Liquefied Natural Gas. Natural gas in liquefied form. Pure natural gas (methane) is a liquid at -162°C at atmospheric pressure.
LOC	Loss Of Containment.
LOHC	Liquid Organic Hydrogen Carrier.
LPG	Liquefied Petroleum Gas. Any material that consists predominantly of any of the following hydrocarbons or mixtures of hydrocarbons: propane, propylene, normal butane, isobutylene, and butylene. LPG is usually stored under pressure to maintain the mixture in the liquid state.
MAWP	Multi-Annual Working Plan.
MEA	Membrane Electrode Assembly.

MCFC	Molten Carbonate Fuel Cell. A type of fuel cell that contains a molten carbonate electrolyte. Carbonate ions (CO_3^{2-}) are transported from the cathode to the anode. Operating temperatures are typically near 650°C .
MIE	Minimum Ignition Energy. The minimum value of the electric energy, stored in the discharge circuit with as small a loss in the leads as possible, which (upon discharge across a spark gap) just ignites the quiescent mixture in the most ignitable composition. For a given mixture composition, the following parameters of the discharge circuit must be varied to get the optimum conditions: capacitance, inductivity, charging voltage, as well as shape and dimensions of the electrodes and the distance between electrodes.
MPa	Mega Pascal ($10^6 \text{ N/m}^2 = 10 \text{ bar}$).
MR	Mixed Refrigerant.
MSEG	Maximum Safe Experimental Gap. A flame can be initiated in the flammable atmosphere even when the height of a channel or gap connecting the two hemispheres of the ignition chamber with the flammable atmosphere beyond the chamber is smaller than the laminar flame quenching diameter.
Near-miss	An event that, under slightly different circumstances, could evolve in an incident.
NGV	Natural Gas Vehicle.
NIST	National Institute of Standards and Technology.
Nm^3/h	Normal cubic meters per hour.
NoE	Network of Excellence.
NTP	Normal Temperature and Pressure. NTP conditions are: temperature 293.15 K and pressure 101.325 kPa .
Overpressure	The pressure more than the ambient pressure, which is created by an explosion, for instance.
PAFC	Phosphoric Acid Fuel Cell. A type of fuel cell in which the electrolyte consists of concentrated phosphoric acid (H_3PO_4). Protons (H^+) are transported from the anode to the cathode. The operating temperature range is generally $160\text{-}220^\circ\text{C}$.
PAR	Passive Autocatalytic Recombiners. A system, where the reaction of premixed hydrogen and oxygen, air respectively, is promoted at low temperatures on a surface coated with catalytic material (typically Pt or Pd). As the reaction starts well below LFL only a little heat is released. Note: recombiner could be a source of ignition for higher concentrations of hydrogen.
PEM	Polymer Electrolyte Membrane, sometimes also Proton Exchange Membrane, is a solid polymer membrane used in corresponding fuel cells and electrolyzers as a solid electrolyte. The membrane is conducting protons (H^+) and therefore represents an acidic medium.
Permeation	Movement of atoms, molecules, or ions into or through a porous or permeable substance.
PGM	Platinum Group Materials.
PHEV	Plugin Hybrid Electric Vehicle.

PEMFC sometimes also PEFC	Polymer Electrolyte or Proton Exchange Membrane Fuel Cell. A type of acid-based fuel cell in which the transport of protons (H+) from the anode to the cathode is through an electrolyte made from a solid polymer. The fuel cells typically run at low temperatures (<100°C) as for proper functioning the membrane must be humidified.
PSA	Pressure Swing Adsorption. A special method for purifying gases.
QDR	Qualitative Design Review.
QRA	Quantitative Risk Assessment.
QRM	Qualitative Risk Matrix.
Quenching	This is the cessation of combustion due to either heat transfer and mass transfer to the surface or aerodynamics effects like strain fields and rapid mixing.
Quenching Distance	A characteristic length scale associated with laminar flame quenching during propagation in a narrow channel or tube.
RA	Risk Assessment.
RCS	Regulations, Codes and Standards.
Regulation	A legal, mandatory requirement.
Risk	Risk is the technical (quantitative) aspect of safety, normally expressed as the product of the probability of a hazard to realise and its associated damage
RPT	Rapid Phase Transition.
RTA	Road Traffic Accident.
Safety	Freedom from unaccepted risks.
Safety distance	Distance to acceptable risk level or minimum risk-informed distance between a hazard source and a target (human, equipment, or environment), which will mitigate the effect of a likely foreseeable incident and prevent a minor incident from escalating into a larger incident. Note: The term 'safety distance' may also be referred to as "safe distance," "separation distance," or "setback distance".
Safety plan	A structured and documented approach to address safety issues in a project
Setback distance	see Safety distance
Separation distance	see Safety distance
SOFC	Solid Oxide Fuel Cell. A type of fuel cell in which the electrolyte is a solid, nonporous metal oxide, typically zirconium oxide (ZrO ₂) treated with Y ₂ O ₃ , and O ₂ is transported from the cathode to the anode. Any CO in the reformat gas is oxidized to CO ₂ at the anode. Temperatures of operation are typically 800-1000°C.
Standard	A required (when referred by a regulation) or agreed level of quality or attainment.
Stoichiometric ratio	The proportion of fuel and oxidizer that will result in complete combustion is known as a stoichiometric ratio.
TPRD	Thermally activated Pressure Relief Device.

Thermal conductivity	The intensive property of a material that indicates its ability to conduct heat. The units of thermal conductivity are typically Watts per meter and Kelvin (W/m/K). Hydrogen shows relatively high thermal conductivity.
UFL	Upper Flammability Limit (75% vol hydrogen in air at normal pressure and temperature).
Under-expanded jet	A gas jet with pressure at the real nozzle exit above the atmospheric pressure.
VCE	Vapour Cloud Explosion.
Vented deflagration	Deflagration mitigation by venting technique. Can be used to mitigate deflagration effects but cannot be used to “mitigate” detonation.

Appendix 2. Applicable Regulations, Codes and Standards

Legal framework

Handling flammable, compressed, or cryogenic substances may be dangerous not only for the person doing it but also for others or society as a whole. Industrialisation brought about not only much larger amounts of such substances used for processes of all kinds but also a more complex structure of the society which is more vulnerable to technical problems. Therefore, for the last two centuries more or less all countries (or their provinces or communities) issued legal requirements or regulations to guarantee a minimum level of safety for human life and health as well as for material values. The increasing safety demands of the modern citizen towards the society, new technologies (nuclear, genetic) as well as new threats (terrorism, pollution) cause an ever-increasing refinement of those rules.

Regulations and standards

A *regulation* is a statutory text at the local, national, regional, or international e.g. United Nations level which is imposed by a legal authority. It usually states minimum safety requirements that are written and adopted by legislative bodies, to regulate a particular kind of activity.

Legal requirements are intended to ensure that a product or system or infrastructure or activity will not impact human safety/health, property or the environment.

A *standard* as discussed here is a document, established by consensus and approved by a recognised standardisation body e.g. ISO, IEC, CEN, CENELEC, BSI etc. that provides, for common and repeated use, rules, guidelines or characteristics for activities or their results, aimed at the achievement of the optimum degree of order in a given context. An international standard is a standard developed and adopted by an international standardisation organisation (like ISO or CEN) and made available to the public.

Many countries have their national standard body, like PKN, DIN, BSI, AFNOR, etc. The general globalisation and the progressing economic integration of the EU member states affect that national standards more and more lose their importance in favour of international ones, which are developed in collaboration of international experts and then adopted nationally.

The application of a standard is not mandatory unless a regulation refers to that standard. Even then, the legal power comes from the regulation, not from the standard.

Role and distinction

Though standards and regulations are frequently mentioned together it should be remembered that they are two fundamentally different concepts. While regulations are mandatory for everybody in its domain, standards are not always mandatory. Standards facilitate the trade and use of goods or services and are developed mainly by industrial bodies. Their main role is to make components or services fit together: pressure cylinders with valves, valves with regulators and further equipment leading the gas to the place of use. This, however, also involves safety issues, and so there is of course an interface with regulations, which are expected to be developed mainly by public bodies.

As shown in Figure A2-1, the main difference between regulations and codes and standards lies in their legal power. Regulations have legally compelling power, whereas standards have not.

Standards are a useful instrument for organisations or interest groups dealing with standardised technology and facilitating international trade.

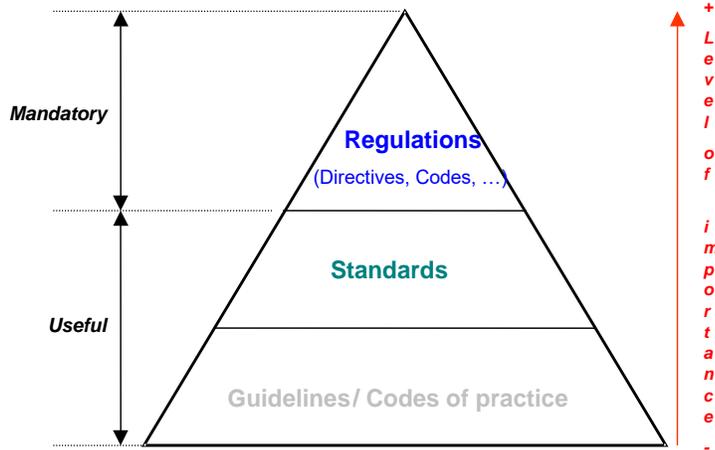


Figure A2-1: Hierarchy of Regulations, Standards and Codes.

The following table highlights the most important characteristics of legal requirements and standards.

Table A2-1. Legal requirements versus standards.

	Regulations	Standards
Purpose	Protection of the public, the environment, employees, material values etc. from damage or danger	Facilitation of the free exchange of goods and services
Source	Legislative bodies, governments, or other political bodies; sometimes technical expert committees under the supervision of the former	Free agreement by those parties which are interested in such a standard (unless it is mentioned in Regulations when a standard becomes mandatory)
Legal role	Law, ordinance or otherwise mandatory instruments	Usually not mandatory, but may be referenced in regulation (then is mandatory) or considered as acceptable practice in court

EU legislation

European laws, such as Directives or Regulations, prevail over national laws. To carry out their task and following the provisions of the Treaty establishing the European Community (the EC Treaty), the Parliament acting jointly with the Council, the Council and the Commission make regulations and issue directives according to Art. 249 of the EC Treaty.

A *directive* shall be binding, as to the result to be achieved, upon each Member State to which it is addressed, but shall leave to the national authorities the choice of form and methods (national transcription).

A *regulation* shall have general application. It shall be binding in its entirety and directly applicable in all Member States. The EU has, for example, a regulation for the type approval of hydrogen vehicles: COMMISSION REGULATION (EU) No 406/2010 of 26 April 2010 implementing Regulation (EC) No 79/2009 of the European Parliament and of the Council on type-approval of hydrogen-powered motor vehicles.

Requirements for products and operational requirements are strictly separated in EU legislation since they belong to different political objectives and are governed by different articles of the EU treaty

Hydrogen gas regulations

Regulations in the EU generally deal with procedures and processes, not so much with individual substances. Substance specific regulations exist only if the substance has quite specific and important dangerous properties of its own (like acetylene or oxygen) or if it is of such economic importance that a specific body of rules makes sense.

Neither is true for hydrogen. Hydrogen is a flammable gas lighter than air, which is not uncommon. There are many other gases like this in extensive use. And even though it is an important substance in the chemical industry its economic importance cannot be compared at the moment with that of e.g. natural gas. This means that guidance for handling hydrogen must be sought by looking up the regulations for what somebody wants to do with hydrogen. Then the general rules must be applied to the specific application.

EU directives relevant for hydrogen

Apart from the directives of the EU listed below, there are also other regulations from other sources. International transport of dangerous goods is dealt with in several international agreements which comprise ADR (road), RID (rail), IMO (sea) and ADNR (inland waterways). Air traffic is cared for by IATA and ICAO. For making sure that motor vehicles can be used internationally there are different provisions; some of them involves the UN ECE, e.g. Regulation 134 for hydrogen vehicles.

Despite the European directives, there are also European regulations. European regulations need – in contrast to European directives - no national implementation for becoming legally binding. An example of this is the COMMISSION REGULATION (EU) No 406/2010 and the UN ECE Regulation 134, both relevant for hydrogen vehicles.

ATEX directive 99/92/EC

ATEX directive 99/92/EC is relative to minimum requirements for improving the safety and health protection of workers potentially at risk from explosive atmospheres (ATEX).

Hydrogen is a flammable gas that can form an ATEX where mixed with air (such an ATEX is defined by the directive as a mixture in which, after ignition occurred, combustion spreads to the entire unburned mixture).

So, any employer who runs facilities, where hydrogen is processed in, shall comply with the requirements of the directive, because his workers are potentially at risk from the effects of

explosions which may be produced by the ignition of an ATEX which can be formed.

A place in which an ATEX may occur in such quantities as to require special precautions to protect the health and safety of the workers concerned is deemed to be hazardous within the meaning of this directive.

The employer shall classify hazardous places where ATEX's may occur into zones based on the frequency and duration of the occurrence of an ATEX and under the following definition:

- Zone 0: a place in which an ATEX is present continuously or for long periods or frequently.
- Zone 1: a place in which an ATEX is likely to occur in normal operation occasionally.
- Zone 2: a place in which an ATEX is not likely to occur in normal operation but, if it does occur, will persist for a short period only.

Where necessary, places, where ATEX's may occur in such quantities as to endanger the health and safety of workers, shall be marked with the underneath sign at their points of entry.

ATEX directive: 2014/34/EU

This directive applies to equipment and protective systems intended for use in potentially explosive atmospheres. It also applies to controlling devices and regulating devices intended for use outside potentially explosive atmospheres but required for or contributing to the safe functioning of equipment and protective systems concerning the risks of explosion are also covered by the scope of this directive.

Both ATEX directives are interrelated. Equipment from certain categories according to 2014/34/EU can be used in certain zones defined according to 99/92/EC but is forbidden in others.

Pressure vessels regulation (stationary)

The PED (Pressure Equipment Directive – 97/23/EC of the European Parliament and of the Council of 29 May 1997 on the approximation of the laws of the Member States concerning pressure equipment) is applicable in Europe since December 1999 and mandatory since the end of May 2002.

It applies to all stationary vessels with a service pressure of more than 0.5 bar and a volume of more than 50 litres.

In the case of hydrogen energy applications, it is particularly relevant for all pressure vessels (cylinders) and safety accessories (valves, flexible hoses, connectors) used for hydrogen fuelling station.

This pressure equipment directive allows using the same design for the pressure vessels and associated accessories everywhere in the EU.

Since this directive is mandatory in Europe, several “Notified Bodies” have been notified to Brussels by the authorities of each EU member state. These notified bodies can make the “evaluation of conformity” of the pressure equipment; this evaluation is confirmed by the “CE” mark applied onto the equipment. Any notified body (from every country) can approve a CE marked equipment to be used in every country of the EU.

This directive only defines the “essential requirements” which are given in its Annex 1. Detailed requirements are given in the harmonized standards (e.g. prepared by CEN). These EN-

Standards are not mandatory, other procedures or “state of the art” can be used by the manufacture to demonstrate to the notified body that the essential requirements are fulfilled.

This European directive does not cover the use of the equipment (operational requirement, periodic inspection, ...) which are still under national regulations. This may create difficulties if such equipment is to be moved from one country to another.

Regulations for the Transport of Dangerous Goods

The transport of dangerous goods is at least internationally in most cases worldwide harmonised and regulated. The basis for this is the UN Model Regulations, the so-called Orange Book. It is published every two years by the UN ECOSOC (Geneva) and leads to subsequent changes in the relevant transport regulations for land, sea and air mode.

Despite this, the perspective of a European user or consignor of hydrogen or other gases is different. There, the basis is the rules for the national implementation of the European directive TPED. The TPED (The Council Directive 1999/36/EC on transportable pressure equipment) applies to transportable pressure equipment and is mandatory since July 1st, 2003 for gas cylinders. It will also apply soon to bundles, drums and trailers (July 1st, 2005 optional and July 1st, 2007 mandatory). Since 2009 the UN ECE regulations for European land transport RID/ADR contain a lot of details that had been part of the 1999/36/EC. The TPED was revised and substituted by the Transportable Pressure Equipment Directive 2010/35/EU(TPED) in 2010.

In the case of hydrogen energy applications, it is particularly relevant for the transport of hydrogen to the fuelling stations. It is also applicable to hydrogen pressure tanks used on the vehicle when these tanks are removable, refilled independently from the vehicle and transported to hydrogen depots. The on-board storage of gases as a propellant in permanently mounted systems is not part of transport regulations. This is part of the approval of the vehicles.

This directive defines the procedural requirements for European conformity assessment and relevant responsibilities and refers to the ADR/RID concerning the technical requirements.

ADR/RID is the transport regulation by road (ADR) and rail (RID) for Europe and many other countries around. TPED refers to “Class 2” (gases), ADR/RID covering also other dangerous substances.

EN (and ISO) standards are referred into the ADR/RID and give presumption of conformity to ADR/RID but normally other routes complying with the technical requirements of ADR/RID can be followed.

Contrary to the PED, TPED also covers the use of the equipment including periodic inspection and any other operational requirement. Consequently, it provides full harmonization in Europe. It also allows to “reassess” old national equipment to transform them into “II” equipment.

Since the distribution of very most hydrogen takes place on road or rail, in some cases over the sea or by air transport, the standards developed or under improvement of CEN TC 23 and ISO TC 58 are very valid for hydrogen. The most important standards that have been referenced in relevant transport regulations are listed here:

- ISO 11114-1:2020 Gas cylinders — Compatibility of cylinder and valve materials with gas contents — Part 1: Metallic materials

- ISO 16148:2016 + Amd 1:2020 Gas cylinders — Refillable seamless steel gas cylinders and tubes — Acoustic emission examination (AT) and follow-up ultrasonic examination (UT) for periodic inspection and testing — Amendment 1
- ISO 9809-1:2019 Gas cylinders — Design, construction and testing of refillable seamless steel gas cylinders and tubes — Part 1: Quenched and tempered steel cylinders and tubes with tensile strength less than 1 100 MPa
- ISO 9809-2:2019 Gas cylinders – Design, construction and testing of refillable seamless steel gas cylinders and tubes – Part 2: Quenched and tempered steel cylinders and tubes with tensile strength greater than or equal to 1 100 MPa
- ISO 9809-3:2010 Gas cylinders – Refillable seamless steel gas cylinders – Design, construction and testing – Part 3: Normalized steel cylinders
- ISO 9809-3:2019 Gas cylinders — Design, construction and testing of refillable seamless steel gas cylinders and tubes — Part 3: Normalized steel cylinders and tubes
- ISO 7866: 2012+ Cor 1:2014 Gas cylinders – Refillable seamless aluminium alloy gas cylinders – Design, construction and testing
- ISO 11119-1:2012 Gas cylinders – Refillable composite gas cylinders and tubes – Design, construction and testing – Part 1: Hoop wrapped fibre reinforced composite gas cylinders and tubes up to 450 l Until further notice
- ISO 11119-2:2012+ Amd 1:2014 Gas cylinders – Refillable composite gas cylinders and tubes – Design, construction and testing – Part 2: Fully wrapped fibre reinforced composite gas cylinders and tubes up to 450 l with load-sharing metal liners
- ISO 11119-3:2013 Gas cylinders – Refillable composite gas cylinders and tubes – Design, construction and testing – Part 3: Fully wrapped fibre reinforced composite gas cylinders and tubes up to 450 l with non-load-sharing metallic or non-metallic liners
- ISO 11119-4:2016 Gas cylinders – Refillable composite gas cylinders – Design, construction and testing – Part 4: Fully wrapped fibre reinforced composite gas cylinders up to 150 l with load sharing welded metallic liners
- ISO 11120:2015 Gas cylinders – Refillable seamless steel tubes of water capacity between 150 l and 3 000 l – Design, construction and testing Until further notice
- ISO 11119-1:2012 Gas cylinders – Refillable composite gas cylinders and tubes – Design, construction and testing – Part 1: Hoop wrapped fibre reinforced composite gas cylinders and tubes up to 450 l
- ISO 11119-2:2012 + Amd 1:2014 Gas cylinders – Refillable composite gas cylinders and tubes – Design, construction and testing – Part 2: Fully wrapped fibre reinforced composite gas cylinders and tubes up to 450 l with load-sharing metal liners
- ISO 11119-3:2013 Gas cylinders – Refillable composite gas cylinders and tubes – Design, construction and testing – Part 3: Fully wrapped fibre reinforced composite gas cylinders and tubes up to 450 l with non-load-sharing metallic or non-metallic liners
- ISO 11515:2013 + Amd 1:2018 Gas cylinders – Refillable composite reinforced tubes of water capacity between 450 l and 3000 l – Design, construction and testing
- ISO 16111:2018 Transportable gas storage devices – Hydrogen absorbed in reversible metal hydride
- ISO 10961:2019 Gas cylinders – Cylinder bundles – Design, manufacture, testing and inspection
- ISO 11114-1:2012 + A1:2017 Gas cylinders – Compatibility of cylinder and valve materials with gas contents – Part 1: Metallic materials ISO 11114-2:2013 Gas cylinders

- Compatibility of cylinder and valve materials with gas contents – Part 2: Non-metallic materials
- ISO 11117:2019 Gas cylinders – Valve protection caps and guards – Design, construction and tests Until further notice
- ISO 10297:2006 Gas cylinders – Refillable gas cylinder valves – Specification and type testing
- ISO 10297:2014 + A1:2017 Gas cylinders – Cylinder valves – Specification and type testing;
- ISO 14246:2014 + A1:2017 Gas cylinders – Cylinder valves – Manufacturing tests and Examinations
- ISO 17871:2020 Gas cylinders – Quick-release cylinder valves – Specification and type testing.
- ISO 17879:2017 Gas cylinders – Self-closing cylinder valves – Specification and type testing
- ISO 16111:2018 Transportable gas storage devices – Hydrogen absorbed in reversible metal hydride
- ISO 6406:2005 Seamless steel gas cylinders – Periodic inspection and testing
- ISO 18119:2018 Gas cylinders – Seamless steel and seamless aluminium-alloy gas cylinders and tubes – Periodic inspection and testing
- ISO 10461:2005/A1:2006 Seamless aluminium-alloy gas cylinders – Periodic inspection and testing
- ISO 11623:2015 Gas cylinders – Composite construction – Periodic inspection and testing
- ISO 22434:2006 Transportable gas cylinders – Inspection and maintenance of cylinder valves
- ISO 20475:2018 Gas cylinders – Cylinder bundles – Periodic inspection and testing
- ISO 16111:2018 Transportable gas storage devices – Hydrogen absorbed in reversible metal hydride

For European land transport, there are a lot more CEN standards referenced for containments that are acceptable for the transport of hydrogen, which are not presented here. In addition, there are several CEN and ISO standards under development or already published but in the process of getting referenced in regulations, like e.g. the EN 17339: 2020 Transportable gas cylinders - Fully wrapped carbon composite cylinders and tubes for hydrogen.

Machinery directive: 2006/42/EG

This directive applies to machinery. It shall also apply to safety components placed on the market separately.

Pressure vessel directive: 2014/68/EU

This directive applies to the design, manufacturing and evaluation of CE conformity of pressurised equipment or set of equipment that work under a pressure above 0.5 bar.

Low voltage directive: 2014/35/EU

For the purposes of this directive "electrical equipment" means any equipment designed for use with a voltage rating of between 50 and 1000 Volt for alternating current and between 75 and 1500 Volt for direct current.

Electromagnetic compatibility directive: 2014/30/EU

This directive applies to apparatus liable to cause electromagnetic disturbance or the performance of which is liable to be affected by such disturbance.

It defines the protection requirements and inspection procedures relating thereto.

Hydrogen standards related to hydrogen

Hydrogen technology makes sense only when it is applied globally. For this reason, it is quite natural that standards for using hydrogen energy are also global. They are made by global standardization bodies (ISO, IEC) or regional ones (CEN, CENELEC).

For ISO the Technical Committee 197 “Hydrogen Technologies” has the leading role for standards development in the field. It cooperates closely with IEC TC 105 “Fuel Cells”, CEN/CENELEC/JTC6 “Hydrogen in Energy Systems”, etc.

Four technical committees (TC) of the International Organization for Standardization (ISO) produce standards relevant to hydrogen and fuel cell technologies, systems, and infrastructure.

ISO/TC 197 “Hydrogen Technologies” list of standards includes:

- ISO 13984:1999. Liquid hydrogen — Land vehicle fuelling system interface;
- ISO 13985:2006. Liquid hydrogen. Land vehicle fuel tanks;
- ISO 16110-1:2007 Hydrogen generators using fuel processing technologies - Part 1: Safety;
- ISO 16110-2:2010. Hydrogen generators using fuel processing technologies — Part 2: Test methods for performance;
- ISO 16111:2018. Transportable gas storage devices — Hydrogen absorbed in reversible metal hydride;
- ISO 26142:2010. Hydrogen detection apparatus. Stationary applications;
- ISO 17268:2020. Gaseous hydrogen land vehicle refuelling connection devices;
- ISO 19880-1:2020. Gaseous hydrogen. Fuelling stations. General requirements;
- ISO 19880-3:2018. Gaseous hydrogen. Fuelling stations. Valves;
- ISO 19880-5:2019. Gaseous hydrogen. Fuelling stations. Dispenser hoses and hose assemblies;
- ISO 19880-8:2019. Gaseous hydrogen. Fuelling stations. Fuel quality control;
- ISO 19881:2018. Gaseous hydrogen. Land vehicle fuel containers;
- ISO 19882:2018. Gaseous hydrogen. Thermally activated pressure relief devices for compressed hydrogen vehicle fuel containers;
- ISO 14687:2019. Hydrogen fuel quality — Product specification;
- ISO 22734:2019. Hydrogen generators using water electrolysis — Industrial, commercial, and residential applications;
- DD ISO/TS 15869:2009. Gaseous hydrogen and hydrogen blends. Land vehicle fuel tanks;
- DD ISO/TS 20100:2008. Gaseous hydrogen. Fuelling stations;
- ISO/TR 15916:2015. Basic considerations for the safety of hydrogen systems;
- ISO/TS 19883:2017. Safety of pressure swing adsorption systems for hydrogen separation and purification;
- ISO/DIS 19884: Gaseous hydrogen -- Cylinders and tubes for stationary storage, etc.
- ISO/TC 22 “Road vehicles” issued the following relevant standards:
- ISO 23273-2:2013 Fuel cell road vehicles - Safety specifications - Part 2: Protection against hydrogen hazards for vehicles fuelled with compressed hydrogen;

- ISO 23828:2013. Fuel cell road vehicles - Energy consumption measurement - Vehicles fuelled with compressed hydrogen;
- ISO/TR 11954:2008. Fuel cell road vehicles - Maximum speed measurement; etc.
- ISO/TC 58 “Gas cylinders” published the following standards:
- ISO 11114-1:2020. Gas cylinders - Compatibility of cylinder and valve materials with gas contents - Part 1: Metallic materials;
- ISO 11114-2:2013. Gas cylinders - Compatibility of cylinder and valve materials with gas contents - Part 2: Non-metallic materials;
- ISO 11114-3:2010. Gas cylinders - Compatibility of cylinder and valve materials with gas contents - Part 3: Autogenous ignition test for non-metallic materials in an oxygen atmosphere;
- ISO 11114-4:2017. Transportable gas cylinders - Compatibility of cylinder and valve materials with gas contents - Part 4: Test methods for selecting steels resistant to hydrogen embrittlement;
- ISO/CD 11114-5 (under development). Gas cylinders - Compatibility of cylinder and valve materials with gas contents - Part 5: Test methods for selecting plastic liners;
- ISO/TR 13086-1:2011. Gas cylinders - Guidance for design of composite cylinders — Part 1: Stress rupture of fibres and burst ratios related to test pressure;
- ISO/TR 13086-2:2017. Gas cylinders - Guidance for design of composite cylinders - Part 2: Bonfire test issues;
- ISO/TR 13086-3:2018. Gas cylinders - Guidance for design of composite cylinders - Part 3: Calculation of stress ratios;
- ISO/TR 13086-4:2019. Gas cylinders - Guidance for design of composite cylinders - Part 4: Cyclic fatigue of fibres and liners;
- ISO/TS 17519:2019. Gas cylinders - Refillable permanently mounted composite tubes for transportation;
- ISO 18172-1:2007. Gas cylinders — Refillable welded stainless steel cylinders — Part 1: Test pressure 6 MPa and below;
- ISO 18172-2:2007. Gas cylinders — Refillable welded stainless steel cylinders — Part 2: Test pressure greater than 6 MPa;
- ISO/TR 19811:2017. Gas cylinders - Service life testing for cylinders and tubes of composite construction;
- ISO 10961:2019. Gas cylinders - Cylinder bundles - Design, manufacture, testing and inspection;
- ISO 11623:2015. Gas cylinders - Composite construction - Periodic inspection and testing;
- ISO 11625:2007. Gas cylinders - Safe handling; ISO 20475:2018. Gas cylinders - Cylinder bundles - Periodic inspection and testing;
- ISO 25760:2009. Gas cylinders - Operational procedures for the safe removal of valves from gas cylinders; etc.

ISO/TC 220 on cryogenic vessels published several standards related to large transportable vacuum-insulated vessels, gas/materials compatibility, and valves for cryogenic service, etc.

It is expected that activities on hydrogen standardization in Europe will be increasing due to the establishment of CEN/CLC/JTC 6 “Hydrogen in energy systems”. European Committee for Standardization (CEN) published:

- EN 17124:2018. Hydrogen fuel. Product specification and quality assurance. Proton exchange membrane (PEM) fuel cell applications for road vehicles;
- EN 17127:2018. Outdoor hydrogen refuelling points dispensing gaseous hydrogen and incorporating filling protocols.

Fuel cells detection and explosion protection are topics that are dealt with by IEC. Among the most important standards published there are IEC EN 60079-10, 14, 17, and 19:

- IEC EN 60079-10 "Electrical apparatus for explosive gas atmospheres. Classification of hazardous areas"
- IEC/EN 60079-14 " Electrical installations design, selection and erection "
- IEC/EN 60079-17 "Electrical apparatus for explosive gas atmospheres. Inspection and Maintenance"
- IEC/EN 60079-19 "Electrical apparatus for explosive gas atmospheres. Repair"

Hydrogen relevant standards are not made only by one or a few committees, however. Since hydrogen energy has relationships to many other fields, standards for pressure vessels, pipelines, gas quality etc. must be taken into consideration as well.

Other of Hydrogen Regulations Codes and Standards and additional source of the information

Additional list of Hydrogen Regulations, Codes and Standards is given in the EHSP Guidance on Hydrogen Safety Engineering (https://www.clean-hydrogen.europa.eu/get-involved/european-hydrogen-safety-panel-0/reference-documents_en)

More comprehensive list of RCS is provided by FCHO standards database¹² and H2tools¹³. The FCHO database is structured along the different categories e.g., transport applications, stationary applications, portable applications, hydrogen generation and infrastructure hydrogen demand. These categories encompass a vast array of standards related to the fuel cell and hydrogen space. H2tools database on another hand provide various standards application types e.g. electrical interfaces, embrittlement tests, fuel cell modules, fuel cell power systems, fuelling systems, fuelling station design and fuel specifications etc.

¹² <https://www.fchobservatory.eu/observatory/Policy-and-RCS>

¹³ <https://h2tools.org/codes-standards>

Appendix 3. Known best practices to implement safety strategies

Table A3-1. Basic safety principles/strategies.

No.	Safety strategy	Example of best practices
0	Proper design and material selection for hydrogen application	<ul style="list-style-type: none"> - Use appropriate materials, compatible with hydrogen, pressure and temperature limits of the facility <p>Avoid system design error</p>
1	Limit hydrogen inventories especially indoors, to what is strictly necessary by technology	<ul style="list-style-type: none"> - Use of on-demand onsite production and/or small storage containers, - Store hydrogen outdoors, etc.
2	Avoid or limit the formation of a flammable mixture	<ul style="list-style-type: none"> - Apply hydrogen safety engineering, e.g. the similarity law, to exclude the formation of the flammable layer under a ceiling in case of a leak, - Ensure system integrity, i.e. leak tightness, - Avoid or control screwed connection of piping, - Use small pipe diameters and flow restrictors, when possible, - Exploit hydrogen buoyancy and natural ventilation as its main safety asset, - Use a mechanical ventilation system or inerting system if natural ventilation does not suffice. - Use the proper design of excess flow valves and discharge nozzles, - Use catalytic recombiners where relevant (bear in mind that for large release rates recombiners might be not suitable and that in high hydrogen concentrations a recombiner could be an ignition source), etc.
3	Carry out ATEX zoning analysis	<ul style="list-style-type: none"> - Provide required documents for design and operation.
4	Combine leak detection and countermeasures	<ul style="list-style-type: none"> - Use appropriate sensors and sensor locations, - Monitor the processes, - Combine emergency signals with appropriate measures, <p>Use signals for ventilation management and shut-down of electricity supply as relevant, etc.</p>
5	Avoid ignition sources by the use of proper materials or installations in the different ATEX zones	<ul style="list-style-type: none"> - Use ATEX materials or equipment, - Avoid electricity, other flammable substances or hot surfaces in respective zones, - Provide proper grounding, - lightning protection in outdoor installations, etc.

6	Avoid congestion, reduce turbulence promoting flow obstacles in the respective ATEX zone	<ul style="list-style-type: none"> - Design piping, components, buildings accordingly - Remove unnecessary parts, etc.
7	Avoid confinement, promote openings for natural or mechanical ventilation or explosion vents	<ul style="list-style-type: none"> - Install whenever possible your system in the open space, - Use the proper design of buildings, HVAC systems, e.g. NF EN 14994 April 2007, - Avoid protective roofs and other construction elements, where hydrogen might accumulate, etc.
8	Prefer passive barriers to active barriers	<ul style="list-style-type: none"> - Increase distances, - Use passive ventilation, - Use passive autocatalytic recombiners (PAR) if no ignition by PAR hazard, - Use protective walls, safety glass, - Use flame arrestors, deflagration vents as appropriate, etc.
9	Train and educate staff in hydrogen safety	<ul style="list-style-type: none"> - Do regular safety checks, reviews, internal audits, - Promote participation in hydrogen safety e-learning and CPD courses, summer and other schools, higher education programmes, etc.
10	Report near misses and incidents	<ul style="list-style-type: none"> - Use HELLEN (contractual obligation in CH JU, restricted access), by contacting JRC-PTT-H2SAFETY@ec.europa.eu and reporting using the template available at: https://ec.europa.eu/eusurvey/runner/CleanH2_HELLEN, - Use HIAD 2.0 or any other relevant database, if you want to make publicly available your report, by contacting JRC-PTT-H2SAFETY@ec.europa.eu and reporting using the template available at: https://ec.europa.eu/eusurvey/runner/HIAD_v2_event_report - Update your safety plan on at least an annual basis, - Inform staff and EHSP, etc.
11	Perform periodic maintenance and audit of hydrogen installations	<ul style="list-style-type: none"> - Define the frequency of audits and maintenance - Only habilitated personnel is allowed to perform the maintenances of hydrogen installations

These safety principles/strategies should be reflected in the safety plan, and in the process of identification of safety vulnerabilities, hazards and associated risk assessment. However, they do not replace either regulation, required risk assessment, or hydrogen safety engineering of system or infrastructure which can resolve safety concerns not yet reflected in RCS. They allow stakeholders to take safety into account at all stages of the system/process/ infrastructure design, deployment and operation.

In each specific situation, any deviation from these principles/strategies shall be discussed by a team that includes but is not limited to a designer, manufacturer or operator, and person in charge of safety. This person must take a firm stand on these principles but also be flexible in their application. Moreover, often a compromise makes it possible to reach an efficient, economic and inherently safer solution.

Besides the principles presented above, project teams may also find the ISO/TR 15916:2015 “Basic considerations for the safety of hydrogen systems” and the H2 Safety Best Practices¹⁴ to be useful references for safety planning of hydrogen and fuel cell systems and infrastructure.

More specific safety guidelines and recommendations have been developed in several safety-related FCH JU funded projects:

- HYPER¹⁵: generated guidelines for permitting of small to medium-sized stationary systems;
- HyApproval¹⁶: produced recommendations for the approval of hydrogen fuelling stations;
- HyIndoor¹⁷: provided recommendations for safely using hydrogen in closed space;
- HyFacts¹⁸ provides a framework for teaching basic issues for public authorities;
- IDEALHY¹⁹: provided safety assessment of LH2 production, transport and storage on a large scale
- HyResponse²⁰ and HyResponder²¹ provides information for first responders
- SUSANA²² provides a framework for verification and validation for CFD to be used in risk assessment

¹⁴ <https://h2tools.org/bestpractices>

¹⁵ Installation permitting guidance for hydrogen and fuel cell stationary applications: UK version: <https://www.hse.gov.uk/research/rrpdf/rr715.pdf>

¹⁶ http://www.hyapproval.org/Publications/The_Handbook/HyApproval_Final_Handbook.pdf

¹⁷ B.L’Hostis, D. Houssin, S. Jallais, E. Vyazmina, G. Dang-Nhu, G. Bernard-Michel, M. Kunetzov, V. Molkov, B. Chernyavsky, V. Shentsov, D. Makarov, R. Dey, P. Hooker, D. Baraldi, E. Weidner, D. Melideo, V. Palmasino, A. Venetsanos, J. Der Kinderen, “European Guidelines and Recommendations for inherently safer indoor use of fuel cells and hydrogen systems”, *International Journal of Hydrogen Energy*, 42 (2017) 7600–7607, DOI:10.1016/j.ijhydene.2016.05.266.

¹⁸ <https://www.h2euro.org/hyfacts/category/education-training/>

¹⁹ <https://www.idealhy.eu/>

²⁰ <http://www.hyresponse.eu/>

²¹ <https://hyresponder.eu/>

²² D. Baraldi, D. Melideo, A. Kotchourko, K Ren, J Yanez, O. Jedicke, S.G. Giannissi, I.C. Toliás, A. G. Venetsanos, J. Keenan, D. Makarov, V. Molkov, S. Slater, F. Verbecke, A. Duclos, Development of a model evaluation protocol for CFD analysis of hydrogen safety issues the SUSANA project, *IJHE* 42 (11), 7633-7643 2016, DOI: 10.1016/j.ijhydene.2016.05.212

- HySEA²³ is generating information on safe venting of standard containers accommodating hydrogen technologies, etc.
- Recommendations for safe use of liquid hydrogen (the PRESLHY²⁴ project output).
- Recommendations for hydrogen driven vehicles and transport through tunnels and similar confined spaces such as underground parking (the HyTunnel-CS²⁵ project output).
- Recommendations for safety and permitting for Hydrogen at Multifuel Retail (the MultHyFuel²⁶ project is on-going project)

²³ <http://www.hysea.eu/>

Skjold, T., Lucas, M., Hisken, H., Atanga, G., Lakshmipathy, S., Bernard, L., van Wingerden, M., van Wingerden, K., Wen, J.X., Rao, V.C.M., Sinha, A., Carcassi, M., Schiavetti, M., Pini, T., Snoeys, J., Hanssen, A.G., Wang, C., Jallais, S., Vyazmina, E., Miller, D. & Bauwens, C.R. (2020). Review of the HySEA project. Proceedings Thirteenth International Symposium on Hazards, Prevention and Mitigation of Industrial Explosions (ISHPMIE 2020), Physikalisch-Technische Bundesanstalt (PTB), ISNI: 0000 0001 2186 1887, Braunschweig, Germany, 27-31 July 2020: 85-106. DOI: <https://doi.org/10.7795/810.20200724>

²⁴ <https://preslhy.eu/>

²⁵ <https://hytunnel.net/>

²⁶ <https://multhyfuel.eu/>

Appendix 4. Methods for identification of safety vulnerabilities, hazards and risk assessment

Identification of safety vulnerabilities (ISV), hazards and risk assessment (RA) can be done using any of the established, standardised industry methods. The methods shall help the project team identify potential safety issues, discover ways to lower the probability of an occurrence and minimise the associated consequences in an incident that could happen.

In applying one of the methods or any suitable combination of them, the project team should always account for:

- All hazards.
- Previous incidents and near-misses.
- Engineering and administrative controls applicable to the hazards and their interrelationships, e.g. the use of hydrogen detectors and emergency shutdown capability.
- Mechanisms and consequences of failure of engineering and administrative controls.
- At least a qualitative evaluation of a range of the possible safety and health effects resulting from the failure of controls.
- Facility location and general conditions of operation.

The ISV, hazards and RA should be performed by a team with sufficient expertise in all aspects of the work to be performed. At least one team member should have experience and knowledge specific to the set of processes, equipment, and facilities being evaluated. Also, one member of the team needs to be knowledgeable in the specific ISV, hazards and RA methods being used. Furthermore, it is recommended to include at least one member, who is an unbiased expert not involved in the project directly and has in-depth education/training in hydrogen safety engineering.

The sequence of methods presented in Table A4-1 implies increasing efforts in executing the respective method.

Table A4-1. Overview of Identification of Safety Vulnerabilities and Risk Assessment Methods.

ISV, RA Method	Description	References
Checklist Analysis	This qualitative method evaluates the project against existing guidelines using a series of checklists. This technique is most often used to evaluate a specific design, equipment, or process, for which an organization has a significant amount of experience.	<ul style="list-style-type: none"> – Appendix 5. Safety plan checklist“ – EIGA Doc. 75/07 Determination of Safety Distances
“What If” Analysis, Structured “What If”	A speculative process where questions of the form “What if ... (hardware, software, instrumentation, or operators) (fail, breach, break, lose	– A barrier analysis of a generic hydrogen refuelling station; Markert, Engebo,

Technique (SWIFT)	functionality, reverse, etc.)?" are formulated and reviewed. Sometimes described as a light-weighted FMEA	Nielson 3 rd ICHS http://conference.ing.unipi.it/ichs2009/images/stories/papers/185.pdf
Hazard Identification (HAZID)	HAZard IDentification (HAZID) is a well-known and well-documented method. A HAZID is a systematic assessment to identify hazards and problem areas associated with plant, system, operation, design and maintenance. HAZID is used both as part of a Quantitative Risk Assessment (QRA) and as a standalone analysis for i.e. installation, modification, replacement, upgrading, reduction, isolation, lifting.	Hazard Identification Methods; Frank Crawley, Brian Tyler, IChemE
Hazard and Operability Analysis (HAZOP)	A qualitative method that systematically evaluates the causes and impact, consequences respectively, of deviations using project information. The method was developed to identify both hazards and operability problems at chemical process plants. Executing the method relies on using guidewords ("such as", "no", "more", "less", ...) combined with process parameters (e.g. temperature, flow, pressure) that aim to reveal deviations (such as less flow, more temperature) of the process intention or normal operation.	Literature review by Jordi Dunjó, Vasilis Fthenakis, Juan A. Vílchez, Josep Arnaldos, https://doi.org/10.1016/j.jhazmat.2009.08.076 . http://conference.ing.unipi.it/ichs2007/fileadmin/user_upload/CD/PAPERS/11SEPT/4.1.294.pdf
Risk Matrix Binning	A qualitative method that combines the categorisation of probabilities and consequences with risk acceptance categories in a matrix form. Sometimes the results of an FMEA are displayed in a Risk Binning Matrix.	Qualitative Risk Assessment of Hydrogen Liquefaction, Storage and Transportation, G. Hankinson and B. Lowesmith
Failure Modes and Effects Analysis (FMEA)	FMEA is a tool to systematically analyse all contributing component failure modes and identify the resulting effect on the system The semi-quantitative method is essentially composed of the following steps: <ul style="list-style-type: none"> ▪ Define your system and the required level of analysis depth. ▪ Identify hazards and events (potentially with an advanced 	https://en.wikipedia.org/wiki/Failure_mode_and_effects_analysis NASA Scientific and Technical Information http://www.sti.nasa.gov/ FMEA for Hydrogen Fueling Options http://conference.ing.unipi.it/ichs2007/fileadmin/user_upload/CD/PAPERS/11SEPT/4.1.294.pdf

	<p>HAZOP) for related equipment, components, and processes</p> <ul style="list-style-type: none"> ▪ Identify potential initiating failure modes and effects for all components and equipment and potentially early detection capabilities. ▪ Determine a risk priority number (RPN). ▪ Agree on acceptable limits for the RPN. ▪ In case, identify potential prevention and mitigation corrective action and re-evaluate RPN. 	<p>ipi.it/ichs2007/fileadmin/user_upload/CD/PAPERS/11SEPT/4.1.294.pdf</p>
Fault Tree Analysis (FTA)	<p>Fault Tree Analysis is a quantitative (with regard to probabilities), deductive (top-down) method used for the identification and analysis of conditions and factors that can result in the occurrence of a specific failure or undesirable event. This method addresses multiple failures, events, and conditions.</p>	<p>Application to a hydrogen pipeline in R. Gerboni, E. Salvador, Hydrogen transportation systems: Elements of risk analysis</p>
Event Tree Analysis and Barrier Analysis	<p>This method is an inductive approach used to identify and quantify a set of possible outcomes. The analysis starts with an initiating event or initial condition and includes the identification of a set of success and failure events that are combined to produce various outcomes. This quantitative method identifies the spectrum and severity of possible outcomes and determines their likelihood.</p>	<p>http://conference.ing.unipi.it/ichs2005/Papers/220003.pdf</p>
Probabilistic Risk Assessment (PRA)	<p>A Probabilistic Risk Assessment (PRA) is a technique where the “Probability” as a measure of the evidence (or uncertainty) is used. It is organized as a process for answering the following three questions:</p> <ul style="list-style-type: none"> - What can go wrong? - How likely is it to happen? - What are the consequences? 	<p>A detailed description of this method can be found in Guidelines for Chemical Process Quantitative Risk Analysis, Center for Chemical Process Safety, American Institute of Chemical Engineers, 1999.</p>
Quantitative Risk Assessment (QRA)	<p>QRA is a method to quantify the risk. Risk is the combination of the probability of an event and its consequence (ISO/IEC Guide 73). In other words, the</p>	<p>Benchmark exercise on risk assessment applied to a hydrogen refuelling station</p>

	risk is the combination of the probability of occurrence of harm and the severity of that harm (where harm is physical injury or damage to the health of people or damage to property or the environment).	http://conference.ing.unipi.it/ichs2009/images/stories/papers/246.pdf Risk assessment methodology for onboard hydrogen storage: https://doi.org/10.1016/j.ijhydene.2018.01.195
Hydrogen Safety Engineering	Application of scientific and engineering principles to the protection of life, property and environment from adverse effects of incidents involving hydrogen.	Fundamentals of Hydrogen Safety Engineering (free download eBook, www.bookboon.com , search “hydrogen”)

A comprehensive risk assessment requires safety vulnerability and hazard identification, risk quantification and acceptance criteria. So, typically methods from the above table are combined and eventually extended by state-of-the-art consequence modelling and risk acceptance criteria.

However, there are obvious limitations in the availability of probabilities, e.g. failure rates and failure modes of system elements, for emerging technologies such as hydrogen technologies. For example failure rate data of components exposed to liquid hydrogen is not available. Real quantitative risk assessments suffer from this critical gap. For critical cases, rather a deterministic approach should be taken, which tries to identify credible worst-case scenarios and tries to mitigate and minimise the consequences to acceptable levels.

The actual selection of methods should depend on the status of the project and the actual inventories of hydrogen handled. It should be noted that identification of hazards and associated risks does not close safety issues and proper hydrogen safety engineering of the system should be undertaken where appropriate. The proposed methods are further detailed below.

Hazard and Operability Analysis (HAZOP)

The HAZOP technique is a structured and systematic examination of a product, process, procedure or an existing or planned system. It is a qualitative technique for the identification of safety vulnerabilities and hazards based on the combination of guide words and parameters of the system, process or product under consideration. It answers the question of how design intent or operating conditions may fail to be achieved at each step of the design process or technique. The guide words must always be appropriately selected for the process which is analysed and additional guide words can be used.

Table A4-2. Guide word method in HAZOP (ISO 31010:2011).

Guide Word	Meaning	Example of Deviation
NO	Absence of the variable to which it applies	No flow in line
LESS	Quantitative reduction	Less flow
MORE	Quantitative increase	Higher temperature
OTHER	Partial or total replacement	Other substances were added
INVERSE	Opposite function to design intention	Return flow
PART OF	Qualitative decline. Only part of what should happen occurs	Part of volume required by recipe was added
IN ADDITION	Qualitative increase. More is produced than intended	In addition of the amount of water of the process was added

The formal application of this procedure shall make sure that no potential deviation, hazard respectively, is overlooked.

The figure below shows a very small excerpt from the results of a HAZOP conducted for the storage unit in a hydrogen filling station. The excerpt focuses on the communication line between compressor and storage vessel, labelled “Node P1” and deviations of the hydrogen flow rate parameter.

HYDROGEN REFUELLING STATION						
Node P1: Communication line between compressor unit and storage vessels at high, medium, and low pressure.						
Process: Filling of storage vessels at high, medium, and low pressure, respectively.						
Deviation	Parameter	Causes	Consequences	Protections	Comments	TOP
No	Hydrogen flowrate	Compressor Failure	Pressure vessel filling interruption.	PLC closes storage unit solenoid valves	Filling interruption.	
		Isolation valve Ivb1 in compression line closed.	Compression line pressure increase.	PLC closes storage unit solenoid valves. PRD1 vent actuates. PS2 switches off the compressor.	Unwanted compression line pressure increase if PRD1 vent fails.	
PS2 switches off the compressor at pressure higher than the storage set point.		Storage vessel overpressurization.	Pressure gauge & pressure transducer reveal overpressure. PLC switches off the compressor & closes the storage unit solenoid valves.	If pressure is too high, storage vent actuates.		
Compressor gas high flow & PR pressure regulator fails.		Pressure increase & possible storage vessel overpressurization.	PS2 switches off the compressor. Pressure gauge & pressure transducer reveal overpressure.	If pressure is too high, storage vent actuates.		
PS2 switches off the compressor at pressure lower than the storage set point		No complete vessel filling.	PLC closes the storage unit solenoid valves.	No complete vessel filling.		
PR pressure regulator fails.		Delay in storage vessel filling.	No.	-		
Less than		Hydrogen leak.	Loss of hydrogen in environment .	PLC, activated by hydrogen sensors, switches off the compressor & closes the storage unit solenoid valves.	If adverse conditions happen, ignition is possible.	TOP 1

Figure A4-1: Example of a HAZOP result for one “node” of a hydrogen refuelling station (Source: RISK ANALYSIS OF THE STORAGE UNIT IN A HYDROGEN REFUELLING STATION, M. Casamirra et al.).

The analysis was extended by considerations about cause, consequence and protection. This task might be shifted rather to a dedicated FMEA.

Risk Binning Matrix

Risk binning is a semi-quantitative analysis tool used to classify vulnerabilities or risks in particular when reliable statistics and probabilistic data is lacking. Each vulnerability can be assigned a qualitative risk using a frequency-consequence matrix, such as the example shown below. The highest consequences are generally assigned to events that could reasonably result in an unintended sudden release of large hydrogen inventories, possibly associated with the failure of a pressure vessel, leading to the destruction of equipment and/or facilities, fatalities or injury to people.

This qualitative risk analysis cannot be used for judgement of risk acceptance but could help to identify the weak points in the technology, system, process or infrastructure that can be addressed by safety engineering design.

The figure below and the respective consequence and likelihood categories are taken from a deliverable of the IDEALHY project.

LH2 Transportation and Storage QRM			Consequence Severity				
			1	2	3	4	5
			Slight Effect No Damage	Minor Injury Minor Damage	Major Injury Moderate Damage	Up to 3 Fatalities Major Damage	More than 3 Fatalities Massive Damage
Likelihood	5	Probable	10	9	1	0	0
	4	Very Possible	92	17	6	1	0
	3	Possible	157	42	31	29	1
	2	Unlikely	154	72	42	35	23
	1	Extremely Unlikely	34	21	74	121	121

Figure A4-2: Example for a Qualitative Risk Matrix (QRM) binning of 60 events with 1093 cases for LH2 transport and storage at a refuelling station (Field colour green: Low Risk, yellow: Medium Risk, red: High Risk).

The chosen likelihood categories are:

- 1: Extremely Unlikely (about 10^{-9} per year)
- 2: Unlikely (about 10^{-7} per year)
- 3: Possible (about 10^{-5} per year)
- 4: Very Possible (about 10^{-3} per year)
- 5: Probable (about 10^{-1} per year)

and the consequence categories:

- 1: Slight Effect (slight injury or health effect, no damage)
- 2: Minor Injury (minor injury or health effect, minor damage)
- 3: Major Injury (major injury or health effect, moderate damage)
- 4: Up to 3 fatalities (or permanent disability, major damage)
- 5: More than 3 fatalities (or massive damage)

Remark: There are different ways of splitting likelihood and consequence into categories giving finer or coarser scales. One example for a more sophisticated consequence categorisation is the „European scale of industrial accidents”²⁷. As the latter is rather designed for large industrial scale and risk binning is still in fact a qualitative method, in the order of 5 categories for likelihood and consequence seem to be appropriate for typical projects.

For the cases with high risk (red coloured cells in Figure A4-2) typically mitigating measures have to be taken. Thus, hydrogen safety engineering should be undertaken to develop or apply already available mitigation measures.

Failure Mode and Effect Analysis (FMEA)

FMEA was one of the first highly structured, systematic techniques for failure analysis. It was developed by reliability engineers in the late 1950s to study problems that might arise from malfunctions of military and aeronautic systems. An FMEA involves reviewing as many components, assemblies, and subsystems as possible to identify failure modes, causes, effects, probabilities and potentials for early detection. For each potential failure the effects, probabilities and – in case – the likelihood of early detection have to be quantified along with respective scales and then recorded in a specific FMEA worksheet. An example of such a worksheet with a relatively high quantitative character is shown in 3.

SYSTEM:	FAILURE MODE AND EFFECTS ANALYSIS (FMEA)										DATE:						
SUBSYSTEM:	FAULT CODE #										SHEET:						
REFERENCE DRAWING:											PREPARED BY:						
Subsystem/Module & Function	Potential Failure Mode	Potential Local Effect(s) of Failure	Potential End Effects(s) of Failure	SEV	C	Potential Cause(s) of Failure	OCC	Current Controls/Fault Detection	DET	RPN	Recommended Action(s)	Area/Individual Responsible & Completion Date(s)	Actions Taken	SEV	OCC	DET	RPN
Subsystem name and function	"How can this subsystem fail to perform its function?" "What will an operator see?"	The local effect of the subsystem or end user.	Downtime # of hours at the system level. 2. Safety 3. Environmental 4. Scrap loss			"How can this failure occur?" Describe in terms of something that can be corrected or controlled. 2. Refer to specific errors or malfunctions		"What mechanisms are in place that could detect, prevent, or minimize the impact of this cause?"			"How can we change the design to eliminate the problem?" "How can we detect (fault isolate) this cause for this failure?" "How should we test to ensure the failure has been eliminated?" "What PM procedures should we recommend?"	"What is going to take responsibility?" "When will it be done?"	"What was done to correct the problem?"				
		<div style="border: 1px solid black; padding: 2px;">Critical Failure symbol (Cr) Used to identify critical failures that must be addressed (i.e., whenever Safety is an issue).</div> <div style="border: 1px solid black; padding: 2px;">Severity Ranking (1-10) (see Severity Table)</div> <div style="border: 1px solid black; padding: 2px;">Occurrence Ranking (1-10) (see Occurrence Table)</div>		7	1		5			6	210			6	1	1	6
						Risk Priority Number RPN = Severity * Occurrence * Detection					<ol style="list-style-type: none"> 1. Begin with highest RPN. 2. Could say "no action" or "Further study is required." 3. An idea written here does not imply corrective action. 		How did the "Action Taken" change the RPN?				

Figure A4-3: Example for an FMEA worksheet.

In the report “FMEA for Hydrogen Fueling Options” a much more simplified worksheet has been used. A4-4 shows an excerpt of the section of this FMEA, which is dealing with the risk of an electrolyser producing hydrogen onsite at the fuelling station. This figure demonstrates that this FMEA has a qualitative character.

²⁷ <https://www.aria.developpement-durable.gouv.fr/in-case-of-accident/european-scale-of-industrial-accidents/?lang=en>

No.	Failure Mode	Cause	Effects	Controls	F	C	Recommendation
Date: July 8, 2003 Process: 2. Electrolysis Study Section: 2A. Water Electrolysis, Hydrogen Generation Design Intent: Generate 1.25 kg/h of >99.99% hydrogen at 150 psig by electrolysis of water							
1.	KOH leak	Mechanical failure or human error	Employee injury	Operator wears rubber gloves and face shield Safety shower and eyewash station in area Polycarbonate shield around cells	L	M	
2.	Exposed electrical circuit 240 volts DC, 600 amps	Human error	Employee injury	Polycarbonate shield around cells limits access	L	H	
3.	Rectifier startup	Human error Turn unit on before turning breaker on and then contact rectifier	Employee injury		L	H	Provide mechanism to prevent turning power on to unit until rectifier breaker is on
4.	Demineralizer failure	Media is saturated or deactivated	Sludge buildup in bottom of cell, no safety hazard	Conductivity detector and high conductivity shutdown at one micro-Siemens	-	-	
5.	KOH pump failure	Mechanical failure	Low water level in cell and high temperature damages cell, no safety hazard	Low level shutdown High temperature shutdown	-	-	
6.	Cell control failure	Instrument failure leading to stack failure	Cell damage with loss of fluid and potential exposure	Low level shutdown High temperature shutdown	L	M	Provide caustic containment sump and drain

Figure A4-4: Excerpt of an FMEA assessing risks of electrolysis as a part of Hydrogen Fuelling Options.

Appendix 5. Safety plan checklist

This checklist is a summary of desired elements for safety plans. The checklist is intended to help project teams verify that their safety plan addresses the important elements and can be a valuable tool over the life of the project. The items below should not be considered as an exhaustive list of safety considerations for all projects. Additionally, all project phases should be addressed in each section as applicable (design, installation/commissioning, operations, maintenance, and decommissioning).

Element	The Safety Plan Should Describe
Project Description	
Description of Activities	<ul style="list-style-type: none"> ▪ Nature of the activities being performed ▪ Quantity and form in which hydrogen is stored and/or handled ▪ Location of activities
Description of Safety Systems	<ul style="list-style-type: none"> ▪ The systems and their functions
Safety expertise and responsibilities	<ul style="list-style-type: none"> ▪ Identification of professional safety expertise
RCS	<ul style="list-style-type: none"> ▪ Relevant RCS applicable to the project
Best Safety Practices and Safety Strategies	<ul style="list-style-type: none"> ▪ Relevant safety practices and strategies (see Appendix 3)
Safety plan approval, update and reporting	<ul style="list-style-type: none"> ▪ Safety plan review, reporting and approval process
Composition and responsibilities of safety teams	<ul style="list-style-type: none"> ▪ Description and role of the technical and operational management safety teams
Technical Hydrogen Safety	

Identification of Safety Vulnerabilities (ISV)	<ul style="list-style-type: none"> ▪ What is the ISV methodology applied to this project, such as Checklist, What If, HAZOP, FMEA, Fault Tree, Event Tree, Probabilistic Risk Assessment, QRA, hydrogen safety engineering, or other methods ▪ Who leads and stewards the use of the ISV methodology ▪ Significant incident scenarios identified ▪ Significant vulnerabilities identified ▪ Safety-critical equipment ▪ Storage and handling of hazardous materials and related topics <ul style="list-style-type: none"> ○ ignition sources, explosion hazards ○ materials interactions ○ possible leakage and accumulation ○ detection ▪ Hydrogen handling systems <ul style="list-style-type: none"> ○ supply, storage, and distribution systems
State-of-the-art	<ul style="list-style-type: none"> ▪ How previous organizational experience with hydrogen technologies and related work is applied to this project
Incident scenarios	<ul style="list-style-type: none"> ▪ Identification of incident scenarios
Hydrogen safety engineering methods	<ul style="list-style-type: none"> ▪ Content and methods of hydrogen safety engineering to be applied
Hazards and Associated Risk Reduction Plan	<ul style="list-style-type: none"> ▪ Prevention and mitigation measures
Organisational Safety Activities	
Procedures	<ul style="list-style-type: none"> ▪ Procedures applicable for the location and performance of the work including sample handling and transport ▪ Operating steps that need to be written for the particular project: critical variables, their acceptable ranges, and responses to deviations from them ▪ Equipment and mechanical integrity <ul style="list-style-type: none"> Initial testing and commissioning Preventative maintenance plan Calibration of sensors Test/inspection frequency basis <p>Documentation</p>
Organisational Policies and Procedures	<ul style="list-style-type: none"> ▪ Application of safety-related policies and procedures to the activities being performed

Element	The Safety Plan Should Describe
Personnel Training	<ul style="list-style-type: none"> ▪ Required general safety training - initial and refresher (CPD) ▪ Hydrogen-specific and hazardous material training - initial and refresher ▪ How the organization stewards training participation and verifies understanding
Safety Reviews and self-audits	<ul style="list-style-type: none"> ▪ Applicable safety reviews beyond the ISV described above ▪ How the team will verify that safety-related procedures and practices are being followed throughout the life of the project
Emergency Response	<ul style="list-style-type: none"> ▪ The plan/procedures for responses to emergencies ▪ Plans for communication and interaction with local emergency response officials
Safety Events and Lessons Learned	<ul style="list-style-type: none"> ▪ The reporting procedure within the team ▪ The system and/or procedure used to investigate events ▪ How corrective measures will be implemented ▪ How lessons learned from incidents and near-misses are documented and disseminated
Documentation	
Project Safety Documentation	<ul style="list-style-type: none"> ▪ How needed safety information is communicated and made available to all participants, including partners. Safety information includes the ISV documentation, procedures, references such as handbooks and standards, and safety review reports ▪ The layout of the system at the planned location ▪ Flow diagram (see Appendix 6 for an example) ▪ Codes and standards discussion ▪ Equipment component descriptions ▪ Critical safety and shutdown table (see Appendix 6 for an
Positive data reporting	<ul style="list-style-type: none"> ▪ Way to report positive safety data for statistics
Crisis management organisation	<ul style="list-style-type: none"> ▪ If relevant, organisation put in place to manage potential crisis situation
Other Comments or Concerns	<ul style="list-style-type: none"> ▪ Any information on topics not covered above

Appendix 6. Additional notes on a safety plan

1. Project brief and objectives

Note: The project brief could include its aim and main objectives relevant to safety provisions. It is advised to describe in the brief the safety aspects after the project formal closure, if relevant.

1.1 Description of a system, process or infrastructure to be developed by the project

Note: It is worth to indicate mass flow rate of hydrogen within the system, e.g. required by the distribution, final customer, or for instance a fuel cell. This could assist in decreasing piping diameter to decrease major hazards, help in assessment of leaked amount of hydrogen depending of reaction of shut-off valve, etc.

For instance, the main components of the fuelling station are described in the schematic below. The main safety components should be presented.

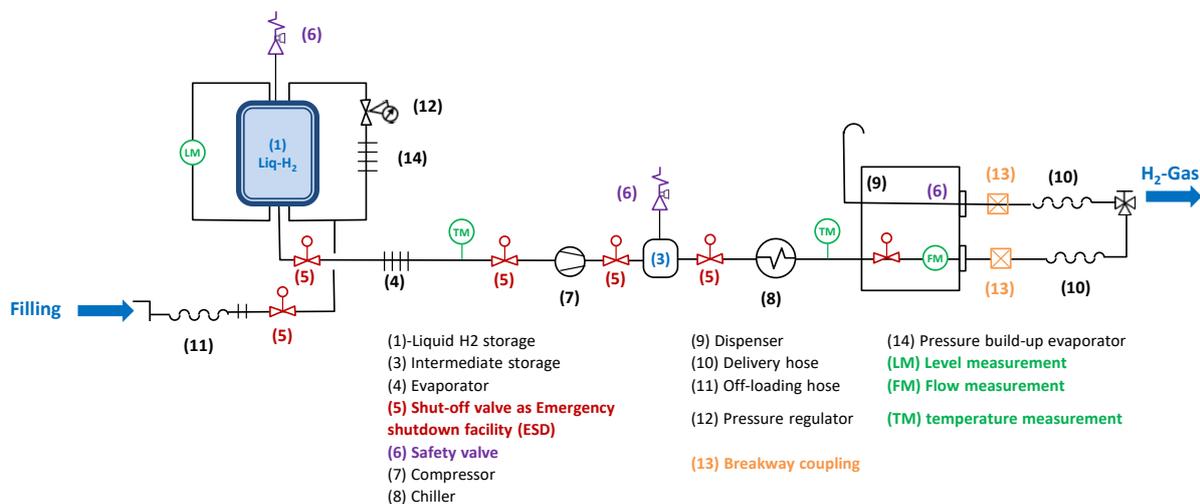


Figure A6-1: Schematic components of a Hydrogen fuelling station with liquid H₂ supplied using a tank car (adapted from P.G.J.Timmers and G. Stam ICHS 2017)

1.2 Description of safety systems and their functions, implementing the state of the art

Note: It is recommended to overview the state of the art in the safety provisions related to the project

1.3 Safety expertise and responsibilities in the consortium

Note: Safety education and thus provisions are of extreme importance for a product competitiveness. It is highly recommended that partners have competencies in hydrogen safety completed education or continuous professional development courses provided by universities and colleges. Example of such courses is postgraduate programme on hydrogen safety at Ulster University (distant learning): <https://www.ulster.ac.uk/research/topic/built-environment/hydrogen-safety-engineering/study>. More information on education and training could be found at Fuel Cell and Hydrogen Observatory (FCHO): <https://www.fchobservatory.eu/observatory/education-and-training>

1.4 Relevant RCS and safety policies

Note: Due to reflection of knowledge in RCS at least 3 years after the knowledge was generated it is strongly recommended to review safety publications beyond current RCS, e.g. in peer reviewed journals, proceedings of the International Conference on Hydrogen Safety, etc. Basic RCS depending on application can be founded on the site <https://www.fchobservatory.eu/observatory/Policy-and-RCS>

<https://h2tools.org/codes-standards>

1.5 Best safety practices

Note: Keep an eye on public deliverables of Clean Hydrogen JU funded projects that are available after publication of this guidance. Special attention should be paid to pre-normative research projects directly devoted to closing safety knowledge gaps and technological bottlenecks.

1.6 Schedule of the safety plan update and deliverable reporting

Note: Pay attention to thorough internal review of safety related deliverables, and, where appropriate, external review, e.g. by European Hydrogen Safety Panel. Annual updates of the safety plan are recommended but this is not mandatory and depends on the project content.

1.7 Composition, responsibilities and reporting schedule of a safety team

Note: Hydrogen safety engineering is a team work. The team should be qualified to assess hazards and associated risks, formulate incidents scenarios, suggest prevention and mitigation measures, as required, to provide acceptance against selected criteria (please consult section 3.2.4 on how to perform hydrogen safety engineering. For more details on approaches, tools and source terms please see EHSP Guidance on Hydrogen Safety Engineering (https://www.clean-hydrogen.europa.eu/get-involved/european-hydrogen-safety-panel-0/reference-documents_en))

2. Description of technical hydrogen safety activities

2.1 Identification of safety vulnerabilities, hazards and associated risks

Note: Completeness of hazard identification by hydrogen safety engineering team is of great importance. Along “standard” hazards that are characteristic for all fuels like unscheduled releases and dispersion, jet fires and deflagrations/detonations, special attention should be paid to “new” hazards, e.g. blast waves and fireballs after hydrogen storage system rupture in a fire, etc.

2.2 Selection of incident scenarios

Note: Selection of incident scenarios defines the amount of work to be carried out in the project by the hydrogen safety engineering team. The number of scenarios should be reasonable within the requested budget and balanced to include the entire spectrum of possible events, including low-probability high-consequences events, that can take place for particular hydrogen system or infrastructure.

2.3 Content and methods of hydrogen safety engineering to be applied

Note: The information on models and procedure of hydrogen safety engineering can be found in various publications, depending on the project content, e.g. in free download eBook “Fundamentals of Hydrogen Safety Engineering” (www.bookboon.com, search “hydrogen”). This information also can be found in the EHSP Guidance on Hydrogen Safety Engineering (https://www.clean-hydrogen.europa.eu/get-involved/european-hydrogen-safety-panel-0/reference-documents_en)

2.4 Prevention and mitigation techniques and strategies and innovative engineering solutions applied

Note: It is expected that the project names innovative solutions that are brought to the project to underpin its success from other projects or provided by the supply chain, and list novel safety strategies and innovative solutions developed (“to be developed” at the initial version of the safety plan).

2.5 Reporting results on hydrogen safety engineering progress and risk assessment as applicable

Note: Reporting is important for dissemination of project results and their exploitation by other stakeholders. Reporting of engineering solutions should target the capability of their reproduction by other stakeholders based on the description and references (unless it is IP protected solution when the contact details of the owner of IP should be indicated). Quantitative risk assessment should include references on the sources of statistical, failure frequencies and other data. It is advised to publish project results, including deterministic studies, in peer reviewed journals to minimise volume of the report (the reference and abstract would be sufficient)

3. Description of organisational safety activities

3.1 Description of work to be performed by staff that needs formal safety procedures

Note: Not to inflate the safety plan volume by copying “established formal procedures for performing hazardous operations and research in organisations” it is recommended to give reference on those established procedures and brief its content. Reference to online document, if available, would be the best way forward for dissemination of new safety culture among stakeholders.

For example, the implementation of the refilling station must identify the safety procedures and the timeline of their applications. The identification of the procedures and the project phases for which they apply is mandatory in a safety plan. An example is summarized in the following table.

Table A6-1. *Procedures and Their Applicable Project Phases.*

Procedures	Design	Installation & commissioning	Operation	Maintenance
Emergency Planning and Management	✓		✓	
Emergency Response	✓		✓	
Energy Isolation		✓		✓
Equipment/Line Opening and Clearing		✓		✓
ESD procedure	✓	✓		✓
Fire and Hydrogen Detection Systems	✓	✓	✓	✓
Grounding Design and Procedures	✓	✓		✓
Hazardous Enclosures	✓	✓	✓	✓
Hose Change out Requirements				✓

Leak Detection and Repair		✓		✓
Lockout/Tag	✓	✓	✓	✓
Management of Change	✓	✓	✓	✓
Mechanical Integrity	✓	✓	✓	✓
Operational Readiness		✓		
Personal Protective Equipment		✓	✓	✓
Planned Inspection and Maintenance				✓
Project Documentation, Retention and Sharing	✓	✓	✓	✓
Project Hazard Review	✓			✓
Purging Flammable Systems	✓	✓		✓
Relief Device Testing and Inspection		✓		✓
Risk Analysis	✓			✓
Safety Integrity Level Design Criteria	✓			
Safety Signs	✓	✓	✓	✓
Testing of Safety Barriers/Equipment		✓		✓
Training Requirements and Procedures	✓	✓	✓	✓
Welding and Brazing Safety		✓		✓

3.2 General safety considerations to prevent harm to people in a workplace

Note: These considerations must include selected thresholds for “Fatality”, “Injury” and “No-harm” to people (still country dependent), and damage effects for buildings and civil structures (“Minor damage”, “Partial demolition”, almost “Total destruction”).

3.3 Personnel training and education plan

Note: The quality training and education in safety discipline is of paramount importance for the project success. The plan should include names and courses to be taken. Example of hydrogen safety education course: <https://www.ulster.ac.uk/research/topic/built-environment/hydrogen-safety-engineering/study>. More information could be found at FCH Observatory: <https://www.fchobservatory.eu/observatory/education-and-training>

3.4 Safety review procedures and/or self-audits

Note: Thorough internal review is highly recommended to make the collegiate documents even more professional. For some projects, the safety plan is reviewed by European Hydrogen Safety Panel. If necessary, the project team involved in preparation and updates of the safety plan could consider face-to-face meeting with EHSP. Decision about such meeting is with Clean Hydrogen JU.

3.5 Emergency response arrangements

Note: Early arrangements of communications with local first responders is mandatory. Another direction of collaborative work with fire brigades is inclusion of their representative(s) for selection of incident scenarios that would require performing deterministic hazards assessment and follow up assessment of associated risks. This interaction shall also include development of the emergency procedures and training of the fire fighters. This document should contain the brief description of the facility/equipment give a detailed explanation how to access the facility including emergency and evacuation paths. The document should describe major hazards and cautions of the facility/equipment, give an inside on hydrogen detection means for any leakages and potential fires, applied ventilation and pressure panels (if appropriate). The description of how the safety system comes to the operation, how the potential hydrogen accumulations is monitored/reduced and how the entire installation can be switched off manually or automatically.

Various alerts and the corresponding procedures including exploration of the cause and the rescue should be written, discussed and shared with the first responders

The detailed layout with the hydrogen equipment storage, emergency shut down equipment, detection devices, mitigation means (ventilation, ATEX zoning, explosion venting, etc.) and evacuation paths and emergency/rescue procedures shall be prepared and shared with first responders. The corresponding training of the first responders and their intervention on the facility should be also foreseen by the project.

Here, an example of the shutdown procedure is given for an HRS: in case of an emergency, the facility must be shut down automatically. To ensure that the shutdown is complete, the facility must be equipped with an emergency shutdown facility which includes shut-off valves. Examples of different scenarios that lead to a shutdown are reported in Table A6-2.

For the Equipment Shutdown, the following steps must be taken:

- shutdown filling operations,
- isolate the valves to the dispenser (Shut-off valves (5) in Figure A6-1)
- and contact system operator

For the Site shutdown scenario, the following steps must be taken:

- shutdown filling operations,
- isolate storages (1) and (3),
- Isolate the Shut-off valves (5)
- shutdown compressor (7)

and contact the fire department or/and system operator

Table A6-2. Example of a shutdown emergency.

Equipment/Alarms	LH2 storage unit (1)	Pressure build up Evaporator (14)	Offloading hose (11)	Evaporator (4)	Compressor (7)	Intermediate storage (3)	Chiller (8)	Dispenser (9)	Delivery hose (10)	Equipment shutdown scenario	Site shutdown scenario
Emergency shutdown facility (ESD)	✓	✓	✓	✓	✓	✓		✓			✓
Pressure regulator	✓	✓								NA	NA
Breakaway coupling									✓	✓	
Level measurement	✓	✓								✓	
Flow measurement								✓		✓	
Temperature measurement				✓			✓			✓	
Flame detection	✓				✓	✓	✓	✓			✓
Leak detection (including acoustic detection)										✓	✓
Hose break			✓						✓	✓	
Mechanical ventilation								✓		✓	
Safety valve / Mechanical relief devices	✓					✓		✓		NA	NA
Atmospheric vent								✓		NA	NA

For each of the components listed above, a procedure should be identified according to the regulations. Documentation must be assembled and provided to the users. The general description must be supplemented with the specific regulations (for example for pressure vessels, low-temperature equipment, etc.).

The emergency shutdown is one of the most important aspects of an emergency but informing the local fire brigades and providing all information for resolving the incident is also of a high priority.

3.6 Management of change procedures

Note: The key in Management of Change is exclusion of decision on changes by one individual. This requires professional review of suggestions and approval by responsible person. All changes should be communication to the project personnel working on the installation and to the first responders. To recall valid and updated procedures should be a part of a periodic training

3.7 Reporting on safety management and lessons learnt (reports of near-misses and incidents, if any, and lessons learned for safety databases)

Note: It is extremely important that Clean Hydrogen JU funding is used with maximum efficiency. One of the mandatory requirements of a number of Clean Hydrogen JU projects is reporting on incident into the restricted-access database HELLEN. Alternatively, it is also possible to report to the public database HIAD 2.0, anonymising the report by avoiding any data that could harm a company, etc. Timely sharing of information on past incidents to all stakeholders allows to learn lessons and helps the whole stakeholders community in reducing the number of future incidents

4. Documentation

4.1 Project safety documentation

Note: All essential documents for the safety plan should be available to the Clean Hydrogen JU, the EHSP and all project partners and appropriate stakeholders (if applicable).

4.2 Positive data reporting

Note: All positive data concerning the projects phases, safety distances, improving design and operations, trainings are important to report. Most of these data are already reported and the major KPIs of the project. However, highlighting safety aspects will help to establish proper and mature safety management culture and will help deriving appropriate statistics for the safety performance in general.

4.3 Crisis management

Each project has to have its own crisis management plan containing emergency procedures in case of any incident. This could include information material for upper management, general public and media. Also recommendation for cleaning up the concerned area and for fast recovery of operations could be compiled.

Note: the EHSP is preparing a separate guidance on crisis management for the Clean Hydrogen JU.

4.4 Dissemination plan of project findings in hydrogen safety, including closed knowledge gaps and addressed technological bottlenecks

Note: for dissemination of best practices, it is useful to illustrate the safety plan and corresponding reports/deliverables by schemes, etc.